



# TEST REPORT: HDR-30-5

## 30W Ultra Slim Step Shape DIN Rail

### ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

### ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

### ■ RELIABILITY TEST

ENVIRONMENT TEST



■ DESIGN VERIFY TEST  
OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 4.50V ~ 5.50V	I/P: 230VAC O/P: MIN LOAD TA: 25°C	CH1: 4.23V ~ 6.19V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: 2.0% ~ -2.0%	I/P: 85VAC / 277VAC O/P: FULL / MINLOAD TA= 25°C	V1: 1.00% ~ -0.80%
3	LINE REGULATION (MAX.)	V1: 1.0% ~ -1.0%	I/P: 85VAC / 277VAC O/P: FULL LOAD TA: 25°C	V1: 0.00% ~ 0.00%
4	LOAD REGULATION(MAX.)	V1: 1.0% ~ -1.0%	I/P: 230VAC O/P: MIN LOAD ~ FULL LOAD TA: 25°C	V1: 0.78% ~ -0.78%
5	OVER/UNDERSHOOT TEST	< ±10%	I/P: 230VAC O/P: FULL LOAD TA: 25°C	TEST< 2.0 %
	RIPPLE & NOISE(Max)	V1: 80 mVp-p	I/P: 230VAC O/P: FULL LOAD TA: 25°C	V1: 56.4 mVp-p

high frequency:

low frequency:

6

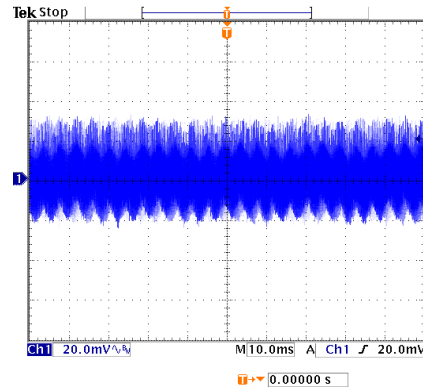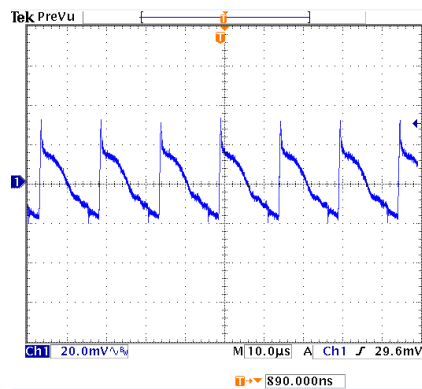


SET UP TIME (MAX.)	230VAC	: 500ms	I/P: 230VAC	230VAC	: 84ms
	115VAC	: 500ms	I/P: 115VAC	115VAC	: 46ms
			O/P: FULL LOAD		
			TA: 25°C		

INPUT=230VAC/50HZ @ FULL LOAD


CH1 : Output Voltage CH2 : AC Input Voltage

7

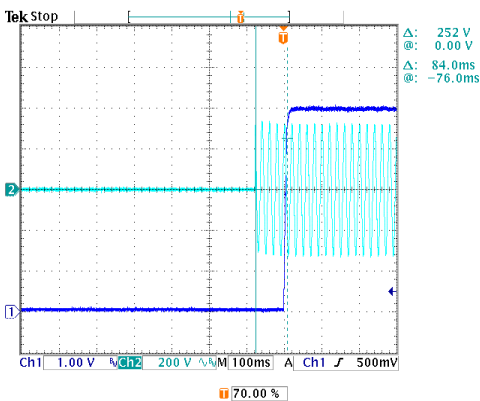

INPUT=115VAC/60HZ @ FULL LOAD


CH1 : Output Voltage CH2 : AC Input Voltage

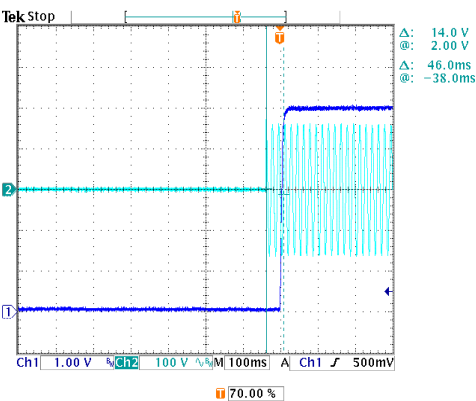


8	RISE TIME (MAX.)	230VAC : 50ms 115VAC : 50ms	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 7.8ms 115VAC : 7.2ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage		
9	HOLD UP TIME (TYP.)	230VAC : 30ms 115VAC : 12ms	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 196.8ms 115VAC : 44.0ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		
10	DYNAMIC LOAD	V1: 1000 mVp-p	I/P: 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA : 25°C	V1: (1). 254mv (2). 215mv unit:mVp-p
	FULL /MIN LOAD 50%DUTY / 120HZ	FULL /MIN% LOAD 50%DUTY / 1KHZ		

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 277VAC 120VDC ~ 390VDC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	67.0VAC ~ 277VAC 98.75VDC ~ 390VDC
			I/P: LOW-LINE = 82VAC HIGH-LINE = 300VAC O/P: FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN ( POWER ON/OFF NO DAMAGE )	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P: 85VAC ~ 277VAC O/P: FULL-MIN LOAD Ta: 25°C	TEST: OK
3	INPUT CURRENT (TYP.)	0.48A / 230VAC 0.88A / 115VAC	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA : 25°C	I= 0.15A / 230VAC I= 0.24A / 115VAC
4	NO LOAD POWER CONSUMPTION	< 0.30W	I/P: 230VAC O/P: MIN LOAD TA : 25°C	< 0.089 W
	EFFICIENCY (TYP.)	82.0%	I/P: 230VAC O/P: FULL LOAD TA : 25°C	83.937 %

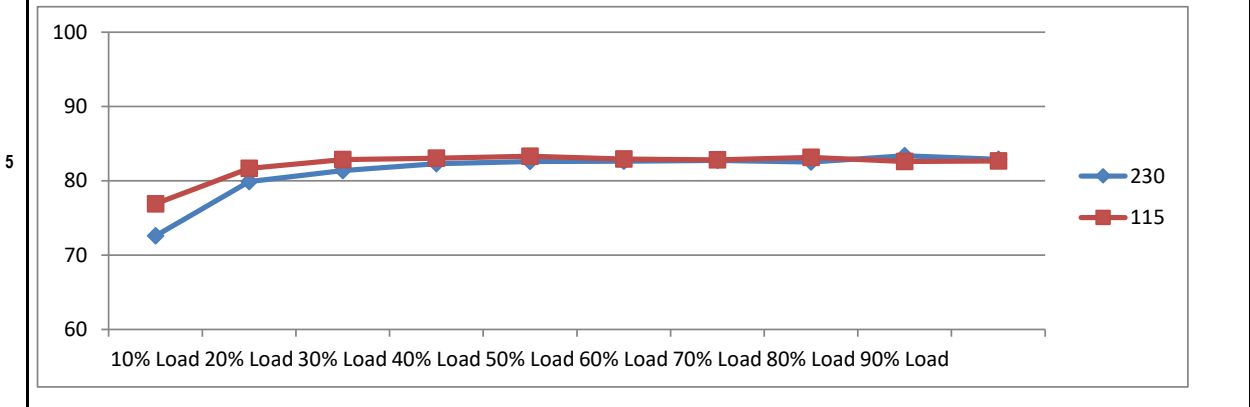

5	INRUSH CURRENT (TYP.)	45A / 230VAC 25A / 115VAC twidh= 555 us measured at 50% Ipeak COLD START	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA : 25°C	I= 35.6A / 230VAC I= 16.4A / 115VAC
		INPUT=230VAC/50HZ @ FULL LOAD	INPUT=115VAC/50HZ @ FULL LOAD	
		CH2 : AC Input Voltage CH4 : Input current (1V=1A)	CH2 : AC Input Voltage CH4 : Input current (1V=1A)	

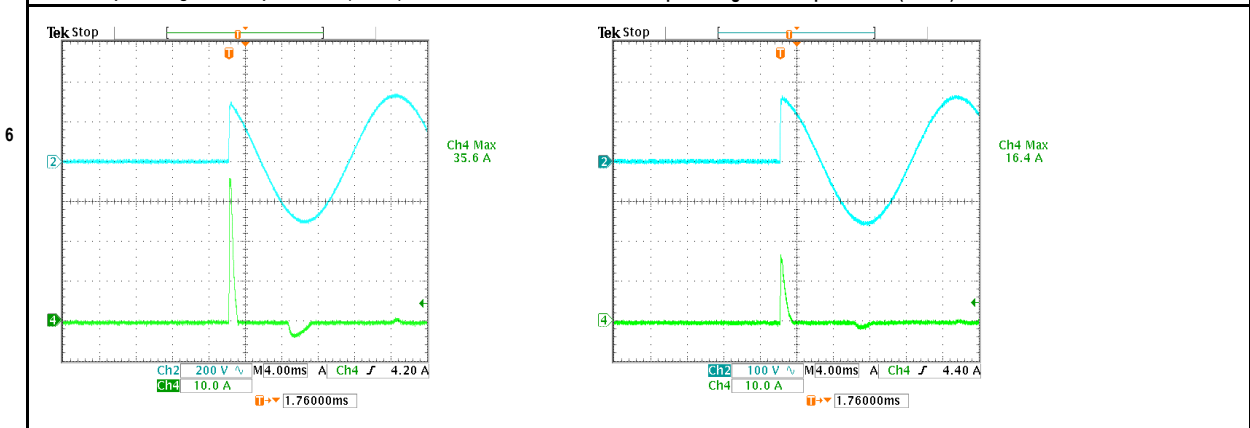

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105% ~ 160%	I/P: 277VAC I/P: 230VAC I/P: 85VAC O/P: TESTING  TA : 25°C	137.00% 277VAC 137.00% 230VAC 137.30% 85VAC  Hiccup mode when output voltage < 50%, recovers automatically after fault condition is removed;  Constant current limiting within 50%~100% rated output voltage, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	5.75V ~ 7.50V	I/P: 277VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD TA : 25°C	6.60V 277VAC 6.60V 230VAC 6.60V 85VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 277VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated: 600V 4.5A	I/P: 280VAC VDS : O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue Ta: 25°C	VIN: 280VAC VDS: (1). 546.00V (2). 480.00V (3). 524.00V
2	O/P Diode	D100 Rated: 60V 20.0A	I/P: 280VAC VDS : O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue Ta: 25°C	D100 VDS : (1). 24.30V (2). 25.80V (3). 24.20V
3	Input Capacitor	C5 Rated: 68uf 400V	I/P: 280VAC O/P: (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta: 25°C	(1). 388.00V (2). 388.00V (3). 386.00V
4	Control IC	U101 Rated: 38V (max) 0V (min)  U1 Rated: 35V (max) 0V (min)	I/P: 280VAC O/P: (1)Full Load (2)Output Short (3)O.L.P Change (4)O.V.P (5)Low Line No Load Vo(min) Ta: 25°C	U101 U1 (1). 26.90V 15.40V (2). 11.90V 6.90V (3). 11.90V 6.00V (4). 31.10V 17.90V (5). 18.90V 10.30V
5	Clamp Diode	D5 Rated: 1000V 1.0A	I/P: 280VAC O/P: (1)Dynamic Load Full/Min Load 90%Duty/1KHz (2)Full load continue Ta: 25°C	(1). 504.00V (2). 510.00V

**SAFETY & E.M.C. TEST**

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.000KVAC /min	I/P-O/P: 4.400KVAC /min Ta: 25°C	I/P-O/P: 1.65mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500VDC Ta: 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

**E.M.C. TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32), CNS13438 CLASS B	I/P: 230VAC /50HZ O/P: FULL LOAD / 50% LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032(CISPR32), CNS13438 CLASS B	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 2KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A

**RELIABILITY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																				
1	TEMPERATURE RISE TEST	MODEL: HDR-30-5 1. ROOM AMBIENT BURN-IN: 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 24.7°C 2. HIGH AMBIENT BURN-IN: 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 49.6°C	ROOM AMBIENT Ta: 24.7°C HIGH AMBIENT Ta: 49.6°C																																																																					
			<table border="1"> <thead> <tr> <th>NO.</th> <th>Position</th> <th>ROOM AMBIENT Ta: 24.7°C</th> <th>HIGH AMBIENT Ta: 49.6°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>ZNR1</td><td>30.3°C</td><td>54.9°C</td></tr> <tr><td>2</td><td>LF2</td><td>36.0°C</td><td>60.7°C</td></tr> <tr><td>3</td><td>Q1</td><td>55.4°C</td><td>81.1°C</td></tr> <tr><td>4</td><td>T1 PRI</td><td>54.4°C</td><td>76.2°C</td></tr> <tr><td>5</td><td>C40</td><td>47.3°C</td><td>71.2°C</td></tr> <tr><td>6</td><td>T1 SEC</td><td>61.0°C</td><td>84.5°C</td></tr> <tr><td>7</td><td>C105</td><td>59.7°C</td><td>83.8°C</td></tr> <tr><td>8</td><td>D100</td><td>81.9°C</td><td>106.2°C</td></tr> <tr><td>9</td><td>LF101</td><td>50.7°C</td><td>74.9°C</td></tr> <tr><td>10</td><td>U1</td><td>49.3°C</td><td>73.5°C</td></tr> <tr><td>11</td><td>BD1</td><td>37.5°C</td><td>61.6°C</td></tr> <tr><td>12</td><td>D5</td><td>49.4°C</td><td>74.6°C</td></tr> <tr><td>13</td><td>RTH1</td><td>40.1°C</td><td>61.0°C</td></tr> <tr><td>14</td><td>LF1</td><td>35.9°C</td><td>59.6°C</td></tr> <tr><td>15</td><td>PCB(B)</td><td>36.3°C</td><td>60.5°C</td></tr> <tr><td>16</td><td>C5</td><td>38.9°C</td><td>63.7°C</td></tr> </tbody> </table>	NO.	Position	ROOM AMBIENT Ta: 24.7°C	HIGH AMBIENT Ta: 49.6°C	1	ZNR1	30.3°C	54.9°C	2	LF2	36.0°C	60.7°C	3	Q1	55.4°C	81.1°C	4	T1 PRI	54.4°C	76.2°C	5	C40	47.3°C	71.2°C	6	T1 SEC	61.0°C	84.5°C	7	C105	59.7°C	83.8°C	8	D100	81.9°C	106.2°C	9	LF101	50.7°C	74.9°C	10	U1	49.3°C	73.5°C	11	BD1	37.5°C	61.6°C	12	D5	49.4°C	74.6°C	13	RTH1	40.1°C	61.0°C	14	LF1	35.9°C	59.6°C	15	PCB(B)	36.3°C	60.5°C	16	C5	38.9°C	63.7°C	
NO.	Position	ROOM AMBIENT Ta: 24.7°C	HIGH AMBIENT Ta: 49.6°C																																																																					
1	ZNR1	30.3°C	54.9°C																																																																					
2	LF2	36.0°C	60.7°C																																																																					
3	Q1	55.4°C	81.1°C																																																																					
4	T1 PRI	54.4°C	76.2°C																																																																					
5	C40	47.3°C	71.2°C																																																																					
6	T1 SEC	61.0°C	84.5°C																																																																					
7	C105	59.7°C	83.8°C																																																																					
8	D100	81.9°C	106.2°C																																																																					
9	LF101	50.7°C	74.9°C																																																																					
10	U1	49.3°C	73.5°C																																																																					
11	BD1	37.5°C	61.6°C																																																																					
12	D5	49.4°C	74.6°C																																																																					
13	RTH1	40.1°C	61.0°C																																																																					
14	LF1	35.9°C	59.6°C																																																																					
15	PCB(B)	36.3°C	60.5°C																																																																					
16	C5	38.9°C	63.7°C																																																																					
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P: 230VAC O/P: 123.00% LOAD Ta: 25°C	TEST: OK																																																																				
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR ( MIN )	I/P: 277VAC / 100VAC O/P: FULL LOAD Ta: -30.0°C	TEST: OK																																																																				
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P: 287VAC O/P: FULL LOAD Ta: 50°C HUMIDITY= 95.0% RH	TEST: OK																																																																				
5	TEMPERATURE COEFFICIENT	±0.03% /(0°C~50°C)	I/P: 230VAC O/P: FULL LOAD	±0.0083% /(0°C~50°C)																																																																				
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -40°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																																																				



7	THERMAL SHOCK TEST	1. Thermal shock Temperature: -35°C ~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC Full Load AC ON/OFF test turn on 58sec; turn off 2sec	TEST: OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (4) Acceleration: 2G (5) Test Time: 60 min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P : FULL LOAD Ta= 25.0°C LIFE TIME (2) I/P: 230VAC O/P : FULL LOAD Ta= 50.0°C LIFE TIME (3) I/P: 230VAC O/P : 75% LOAD Ta= 50.0°C LIFE TIME (4) I/P: 230VAC O/P : 50% LOAD Ta= 50.0°C LIFE TIME	(1). 158118 HRS (2). 56064 HRS (3). 125618 HRS (4). 158118 HRS
10	MTBF	3670.4K hrs min. Telcordia SR-332 (Bellcore) ; 968.1K hrs min. MIL-HDBK-217F (25 °C)	
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 50°C O/P: FULL LOAD	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A5