



Test Report: HLG-480H-36

480W Constant Voltage + Constant Current LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



■ RELIABILITY TEST

ENVIRONMENT TEST


DESIGN VERIFY TEST

OUTPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	CH1: 18 V~ 36V	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	0.14V~ 36 V /230VAC
2	VOLTAGE ADJUST RANGE	CH1: 30.6 V~ 37.8V	I/P: 230 VAC I/P:115VAC O/P:MIN LOAD Ta:25°C	27.964V~ 38.765V /230VAC 27.951V~38.768 V/115VAC
3	CURRENT ADJ. RANGE	CH1: 6.6 A~ 13.3 A	I/P: 230 VAC I/P:115VAC O/P:CV MIN & CV MAX-1V Ta:25°C	4.798A~14.099A /230VAC@CV MAX-1V 4.809A~14.039A /230VAC@CV MIN 4.797A~14.091A/115VAC@CV MAX-1V 4.811A~14.046A/115VAC@CV MIN
4	OUTPUT VOLTAGE TOLERANCE (Max)	V1:1% ~ -1 %	I/P:100VAC /305AC O/P:FULL/ MIN LOAD Ta:25°C	V1: 0.11%~ -0.22%
5	LINE REGULATION (Max)	V1: 0.5% ~ -0.5 %	I/P:100VAC~305AC O/P:FULL LOAD Ta:25°C	V1: 0%~- 0.027%
6	LOAD REGULATION (Max)	V1: 0.5 % ~ -0.5 %	I/P: 230 VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.166%~- 0.166 %
7	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST: <5%
8	RIPPLE & NOISE (Max)	V1: 250 mVp-p	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	V1: 68mVp-p

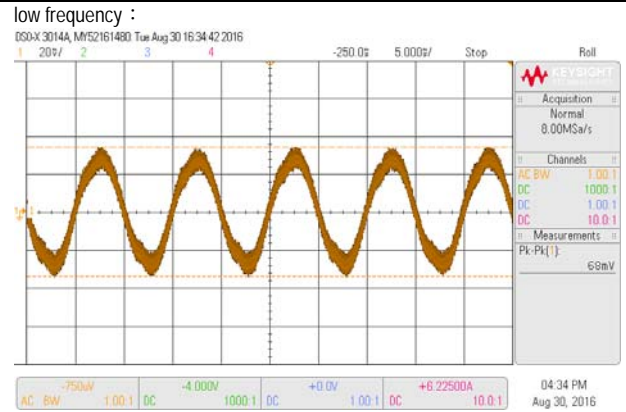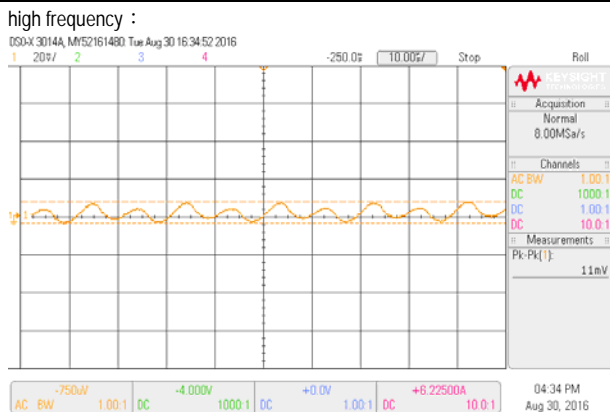


9	SET UP TIME (Max)	230VAC/ 500 ms 115VAC/ 500 ms	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 246 ms 115 VAC/ 274ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		

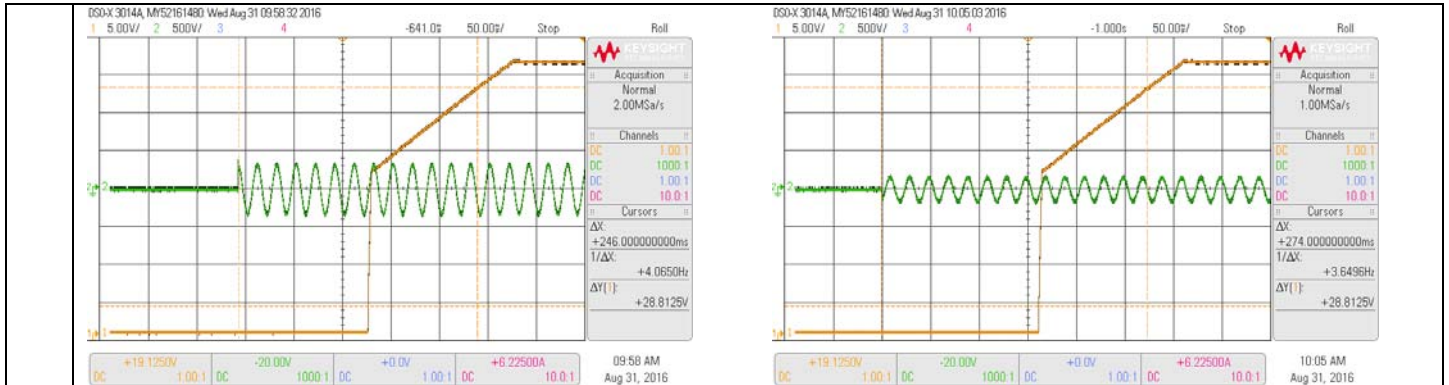


10	RISE TIME (Max)	230VAC/ 80 ms 115VAC/ 80 ms	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 39.6ms 115 VAC/39.2ms
	<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p> <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>			

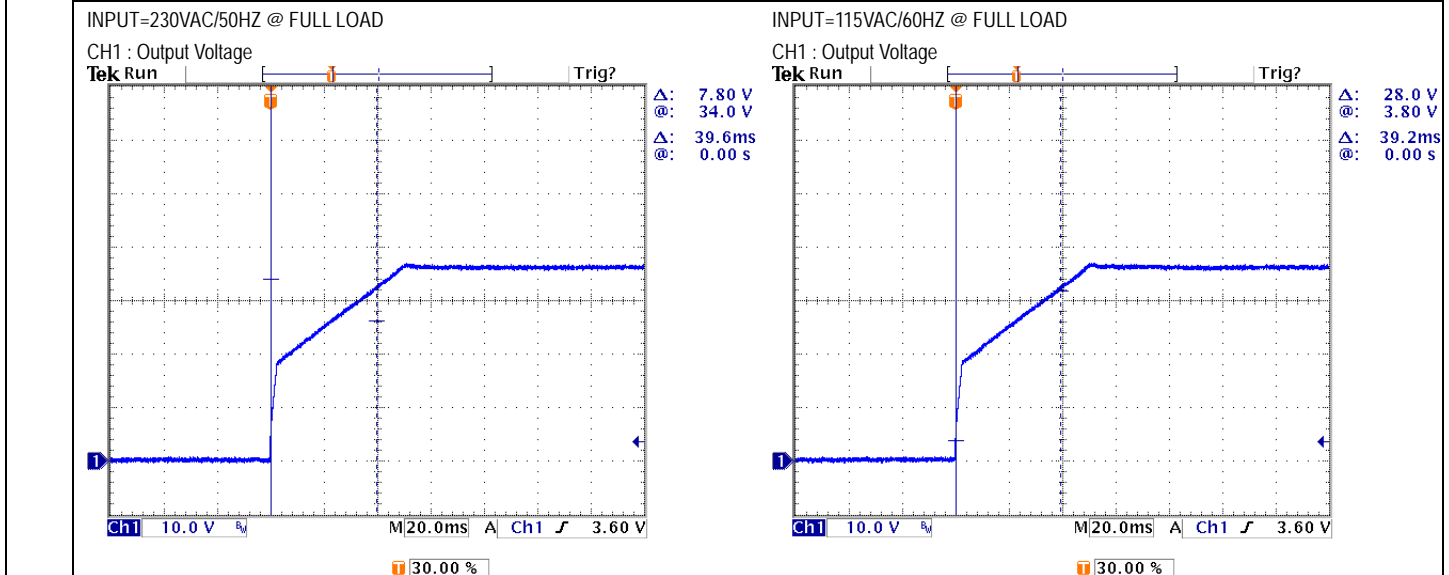


11	HOLD UP TIME (Typ.)	230VAC/ 16 ms 115VAC/ 16 ms	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/28.8ms 115 VAC/28.8ms
	<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p> <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p>			

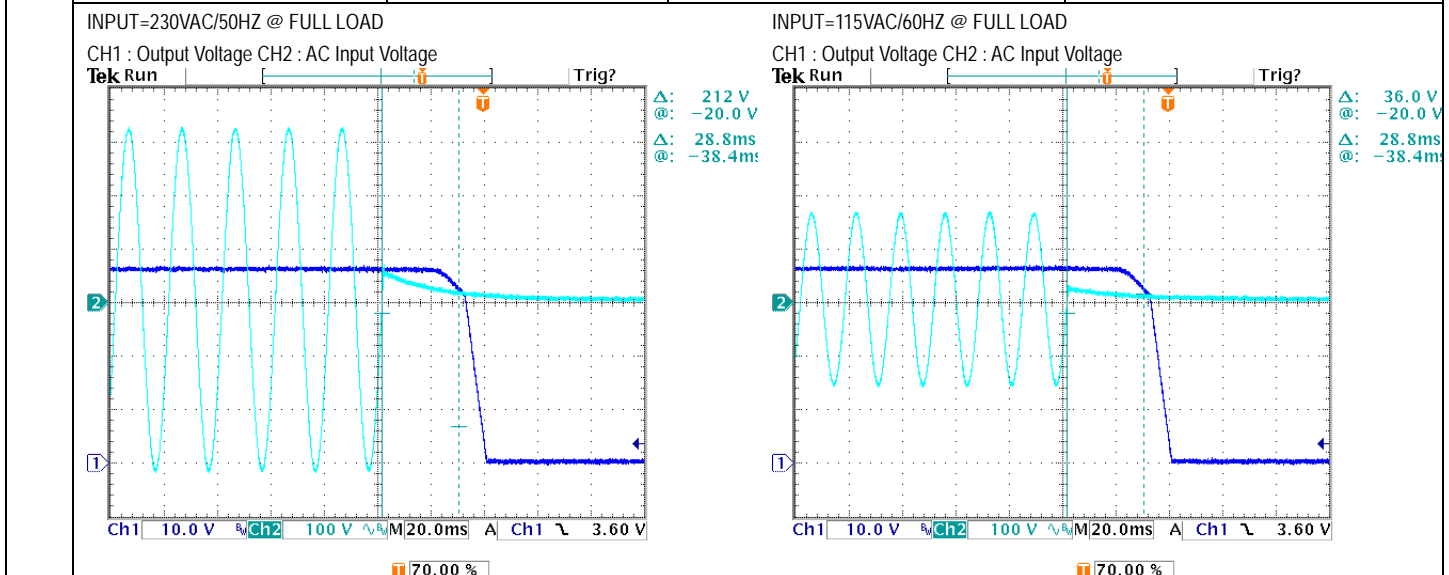

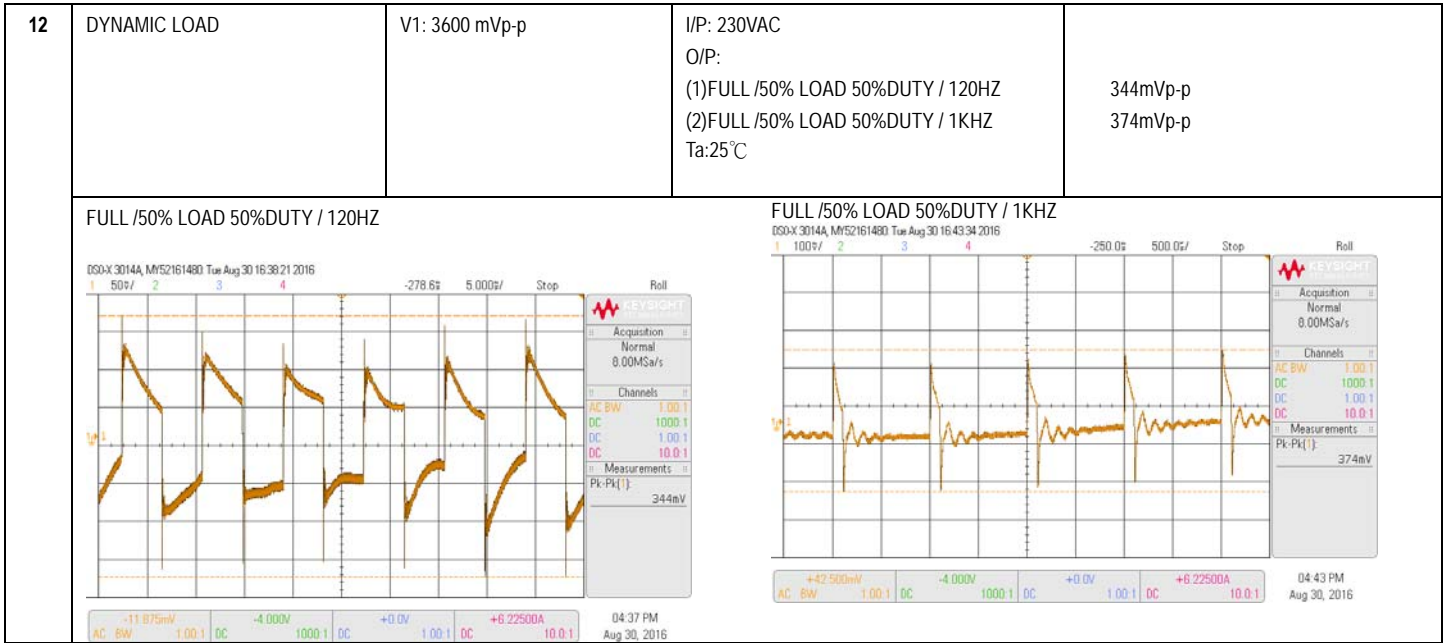


INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P: TESTING O/P: FULL LOAD Ta:25°C	72V~305 V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~305VAC O/P: FULL-MIN LOAD Ta:25°C	OK
3	INPUT CURRENT (TYP)	277VAC/ 2 A 230 VAC/ 2.45 A 115 VAC/ 5 A	I/P: 277VAC/230 VAC/115 VAC O/P: FULL LOAD Ta:25°C	I=1.78A/277VAC I =2.11A/ 230VAC I =4.24A/ 115VAC
4	LEAKAGE CURRENT	< 0.75 mA / 277VAC	I/P : 277 VAC O/P : Min LOAD Ta : 25°C	L-FG: 0.25mA N-FG: 0.24mA
6	POWER FACTOR(TYP)	0.97/230 VAC FULL LOAD 0.98/115 VAC FULL LOAD 0.95/277 VAC FULL LOAD	I/P: 230 VAC/115VAC/277VAC O/P: FULL LOAD Ta:25°C	PF=0.981/230V/100%LOAD PF= 0.995/115V/100%LOAD PF= 0.958/277V/100%LOAD

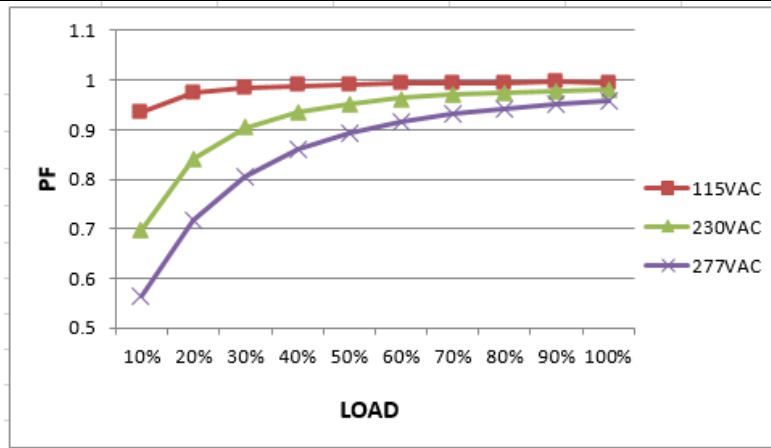


7	EFFICIENCY (TYP)	95 %	I/P: 230 VAC	95.21% /230V
		95.5%	I/P: 277 VAC O/P: FULL LOAD Ta:25°C	95.54% /277V

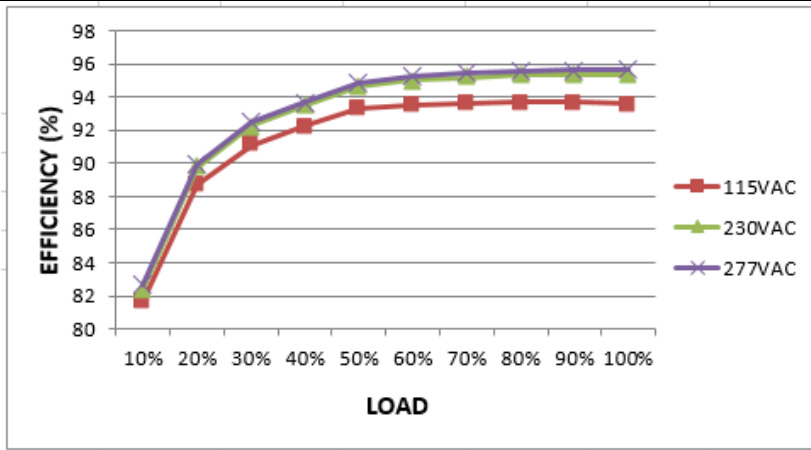

8	INRUSH CURRENT (TYP)	230 V/ 35A	I/P: 230 VAC	I = 33.1A/ 230VAC
		COLD START	O/P: FULL LOAD Ta:25°C	T50= 1500 us
		(twidth=1800us measured at 50% Ipeak) COLD START 1.8ms		

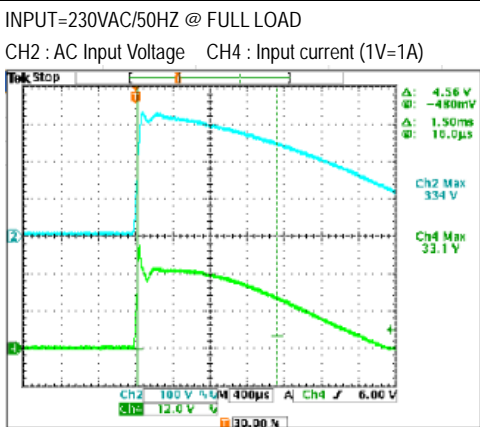

9	TOTAL HARMONIC DISTORTION	THD < 20% @ output load ≥ 40% at 115VAC/230/277VAC input	I/P : 115VAC O/P : 100% LOAD 40% LOAD Ta : 25°C	THD : 6.51 % THD : 6.77 %
			I/P : 230VAC O/P : 100% LOAD 40% LOAD Ta : 25°C	THD : 6.17 % THD : 9.68 %
			I/P : 277VAC O/P : 100% LOAD 40% LOAD Ta : 25°C	THD : 9.02 % THD : 15.66 %

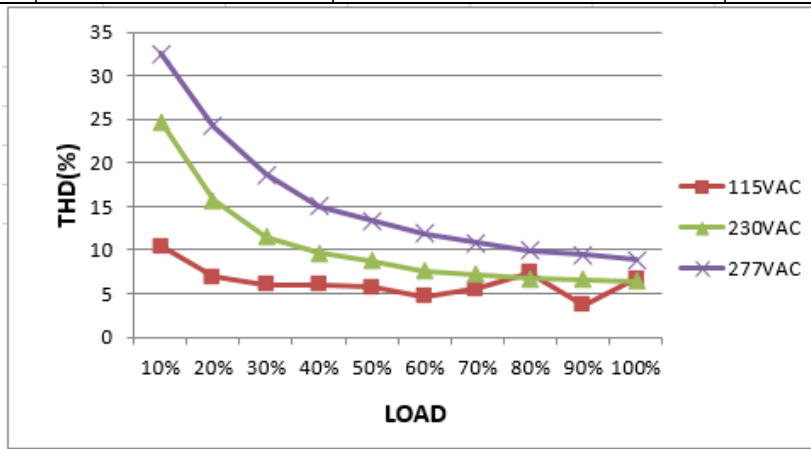

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	95 %- 108 % PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	100.8%/ 305VAC 100.81%/ 230VAC 100.71%/100VAC PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	V1: 40 V- 50 V PROTECTION TYPE : Shut down output voltage, re-power on to recovery	I/P: 305VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta: 25°C	47.708V/ 305VAC 41.72V/ 230VAC 41.65V/ 90VAC PROTECTION TYPE : Shut down output voltage, re-power on to recovery
3	OVER TEMPERATURE PROTECTION	PROTECTION TYPE : Shut down output voltage, re-power on to recovery	I/P: 305 VAC I/P: 90 VAC O/P: FULL LOAD	O.T.P Active PROTECTION TYPE : Shut down output voltage, re-power on to recovery
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed	I/P: 305VAC I/P: 90 VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 10 Rated 13 A/ 650 V Q 12 Rated 13 A/ 650 V	I/P:High-Line +3V =308V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load.	Q10 Q13 VDS: (1)478V (2)474V (3)478V (4)482V (5)486V (6)486V (7)474V VDS: (1)526V (2)514V (3)534V (4)526V (5)530V (6)522V (7)506V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 13 A/ 650 V	I/P:High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1)522V (2)454V (3)526V (4)522V (5)534V (6)522V (7)478V
3	P.F.C DIODE	D8 Rated 12A/ 650V	I/P:High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1)462V (2)466V (3)462V (4)466V
4	Diode Peak Voltage	Q120 Rated 80A/100 V Q121 Rated 80A/100 V	I/P:High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q120:. Q121: VDS: (1)83.6V (2)18.5V (3)84.4V (4)86V (5)87.6V (6)85.2V (7)84.4V (8)80.4V VDS: (1)86V (2)6.1V (3)87.8V (4)87.8V (5)88.6V (6)86.1V (7)86.1V (8)82.1V
5	Input Capacitor Voltage	C5 Rated: 150 μ / 450V	I/P:High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off	(1)449V (2)449V (3)447V

			(3) Full Load /Min load Change (4) Full load continue Ta:25°C	(4) 439V
6	Control IC Voltage Test	PWM IC U2 Rated 16V- 8.85V(MIN.) PFC IC U1 Rated 20V-10.5V(MIN.)	I/P: High-Line +3V =308 V AC ON/OFF O/P(1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. Ta:25°C	U2 (1) 14.49V (2) 14.89V (3) 14.33V (4) 13.37V U1 (1) 15.3V (2) 15.14V (3) 14.57V (4) 14.25V

SAFETY & EMC TEST REPORT

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	IEC60950-1 I/P-O/P: 3.75KVAC/min I/P-FG: 2 KVAC/min O/P-FG: 1.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 5.85mA I/P-FG: 5.2mA O/P-FG: 6.15mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC > 100MΩ I/P-FG: 500VDC > 100MΩ O/P-FG: 500VDC > 100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 19.9 GΩ I/P-FG: 13.1 GΩ O/P-FG: 30G Ω NO DAMAGE
3	GROUNDING CONTINUITY	IEC60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	25mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015 CLASS B	I/P: 230 VAC /50HZ O/P: FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55015 CLASS B	I/P: 230 VAC /50HZ O/P: FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta:25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results, please refer to the latest EMC test report.			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																												
1	TEMPERATURE RISE TEST	MODEL : HLG-480H-48 1. ROOM AMBIENT BURN-IN : 2.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 29.4 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 63.8 °C																																																																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 29.4 °C</th> <th>HIGH AMBIENT Ta= 63.8 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD2</td><td>84.4°C</td><td>97.6°C</td></tr> <tr><td>2</td><td>C10</td><td>81.5°C</td><td>94.7°C</td></tr> <tr><td>3</td><td>Q1</td><td>82.4°C</td><td>95.6°C</td></tr> <tr><td>4</td><td>D8</td><td>84.6°C</td><td>97.6°C</td></tr> <tr><td>5</td><td>Q10</td><td>83.0°C</td><td>96.2°C</td></tr> <tr><td>6</td><td>Q12</td><td>83.7°C</td><td>96.9°C</td></tr> <tr><td>7</td><td>RY1</td><td>83.1°C</td><td>95.9°C</td></tr> <tr><td>8</td><td>ZNR2</td><td>77.8°C</td><td>89.2°C</td></tr> <tr><td>9</td><td>C1</td><td>76.8°C</td><td>88.2°C</td></tr> <tr><td>10</td><td>C5</td><td>77.8°C</td><td>89.8°C</td></tr> <tr><td>11</td><td>L3</td><td>83.0°C</td><td>96.5°C</td></tr> <tr><td>12</td><td>U1</td><td>78.4°C</td><td>89.9°C</td></tr> <tr><td>13</td><td>U2</td><td>79.1°C</td><td>91.1°C</td></tr> <tr><td>14</td><td>T1 Primary side</td><td>83.2°C</td><td>98.0°C</td></tr> <tr><td>15</td><td>T2 Primary side</td><td>85.1°C</td><td>99.2°C</td></tr> <tr><td>16</td><td>Q100</td><td>82.9°C</td><td>98.0°C</td></tr> <tr><td>17</td><td>Q121</td><td>83.0°C</td><td>98.2°C</td></tr> <tr><td>18</td><td>C115</td><td>77.6°C</td><td>91.8°C</td></tr> <tr><td>19</td><td>C117</td><td>75.1°C</td><td>89.2°C</td></tr> <tr><td>20</td><td>LF100</td><td>74.5°C</td><td>88.9°C</td></tr> <tr><td>21</td><td>T500</td><td>78.6°C</td><td>91.6°C</td></tr> <tr><td>22</td><td>C511</td><td>78.8°C</td><td>91.8°C</td></tr> <tr><td>23</td><td>U501</td><td>78.0°C</td><td>91.1°C</td></tr> <tr><td>24</td><td>J101</td><td>77.9°C</td><td>92.5°C</td></tr> <tr><td>25</td><td>RTH2</td><td>79.3°C</td><td>91.8°C</td></tr> <tr><td>26</td><td>C93</td><td>80.6°C</td><td>93.4°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 29.4 °C	HIGH AMBIENT Ta= 63.8 °C	1	BD2	84.4°C	97.6°C	2	C10	81.5°C	94.7°C	3	Q1	82.4°C	95.6°C	4	D8	84.6°C	97.6°C	5	Q10	83.0°C	96.2°C	6	Q12	83.7°C	96.9°C	7	RY1	83.1°C	95.9°C	8	ZNR2	77.8°C	89.2°C	9	C1	76.8°C	88.2°C	10	C5	77.8°C	89.8°C	11	L3	83.0°C	96.5°C	12	U1	78.4°C	89.9°C	13	U2	79.1°C	91.1°C	14	T1 Primary side	83.2°C	98.0°C	15	T2 Primary side	85.1°C	99.2°C	16	Q100	82.9°C	98.0°C	17	Q121	83.0°C	98.2°C	18	C115	77.6°C	91.8°C	19	C117	75.1°C	89.2°C	20	LF100	74.5°C	88.9°C	21	T500	78.6°C	91.6°C	22	C511	78.8°C	91.8°C	23	U501	78.0°C	91.1°C	24	J101	77.9°C	92.5°C	25	RTH2	79.3°C	91.8°C	26	C93	80.6°C	93.4°C
NO	Position	ROOM AMBIENT Ta= 29.4 °C	HIGH AMBIENT Ta= 63.8 °C																																																																																																													
1	BD2	84.4°C	97.6°C																																																																																																													
2	C10	81.5°C	94.7°C																																																																																																													
3	Q1	82.4°C	95.6°C																																																																																																													
4	D8	84.6°C	97.6°C																																																																																																													
5	Q10	83.0°C	96.2°C																																																																																																													
6	Q12	83.7°C	96.9°C																																																																																																													
7	RY1	83.1°C	95.9°C																																																																																																													
8	ZNR2	77.8°C	89.2°C																																																																																																													
9	C1	76.8°C	88.2°C																																																																																																													
10	C5	77.8°C	89.8°C																																																																																																													
11	L3	83.0°C	96.5°C																																																																																																													
12	U1	78.4°C	89.9°C																																																																																																													
13	U2	79.1°C	91.1°C																																																																																																													
14	T1 Primary side	83.2°C	98.0°C																																																																																																													
15	T2 Primary side	85.1°C	99.2°C																																																																																																													
16	Q100	82.9°C	98.0°C																																																																																																													
17	Q121	83.0°C	98.2°C																																																																																																													
18	C115	77.6°C	91.8°C																																																																																																													
19	C117	75.1°C	89.2°C																																																																																																													
20	LF100	74.5°C	88.9°C																																																																																																													
21	T500	78.6°C	91.6°C																																																																																																													
22	C511	78.8°C	91.8°C																																																																																																													
23	U501	78.0°C	91.1°C																																																																																																													
24	J101	77.9°C	92.5°C																																																																																																													
25	RTH2	79.3°C	91.8°C																																																																																																													
26	C93	80.6°C	93.4°C																																																																																																													
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 100 % LOAD Ta= -45 °C	TEST : OK																																																																																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 315 VAC O/P : FULL LOAD Ta= 60°C HUMIDITY= 95 %R.H	TEST : OK																																																																																																												
4	TEMPERATURE COEFFICIENT	± 0.02 %/°C(0-60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.004 %/°C(0-60°C)																																																																																																												



5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -50°C~ +125°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 100 CYCLE 5. Input/Output condition : STATIC	OK
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	OK
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
8	CAPACITOR LIFE CYCLE	SUPPOSE C116 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Tc= 75°C LIFE TIME (2) I/P : 230VAC O/P : 75% LOAD Tc= 75°C LIFE TIME (3) I/P : 230VAC O/P : 50% LOAD Tc= 75°C LIFE TIME	(1) 88718HRS (2) 91767HRS (3) 104488HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 345.5K hrs min. Telcordia SR-332 (Bellcore) ; 95.3K hrs min. MIL-HDBK-217F (25°C)	
10	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 62,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

12.10.30 A50-F031

