



Test Report: IDPC-25-1050

25W Constant Current Mode LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST



NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	16.8V~24V	I/P: 230VAC O/P: LED MODE Ta: 25°C	12V~23V
2	CURRENT RIPPLE	5% max@rated current	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	2.3%
3	CURRENT TOLERANCE	±7%	I/P: 230VAC O/P: FULL/MIN LOAD Ta: 25°C	4.09%
4	OPEN CIRCUIT VOLTAGE (max)	36V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	30.98V
5	OVER/UNDERSHOOT TEST	<±5 %	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	±1.802%
6	SET UP TIME	500ms/230VAC 1200ms/115VAC	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	324ms/230VAC 350ms/115VAC
<div style="display: flex; justify-content: space-around;"> <div style="width: 45%;"> <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> <p>Δ: 160 V @: -270 V Δ: 324ms @: -308ms</p> <p>Ch1 4.80 V Ch2 250 V M 100ms A Ch1 19.2 V</p> <p>70.00 %</p> </div> <div style="width: 45%;"> <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1: Output Voltage CH2: AC Input Voltage</p> <p>Δ: 175 V @: 25.0 V Δ: 350ms @: -332ms</p> <p>Ch1 4.80 V Ch2 250 V M 100ms A Ch1 19.2 V</p> <p>70.00 %</p> </div> </div>				
7	AUXILIARY DC OUTPUT (A-Type only)	Nominal 12V (deviation 11.4~12.6) @50mA	I/P: 230 VAC O/P:FULL LOAD	11.92 V

8 DIMMING TEST



SPEC:

- Output constant current level can be adjusted by applying one of the two methodologies between DIM+ and DIM-: 0 ~ 10Vdc, or 10V PWM signal.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.

© Applying additive 0 ~ 10VDC

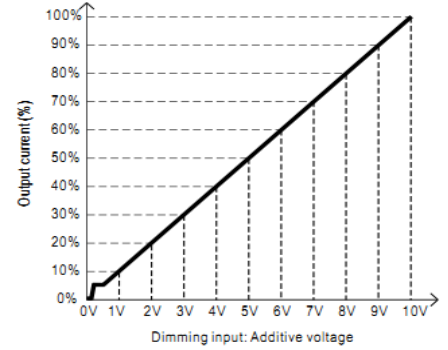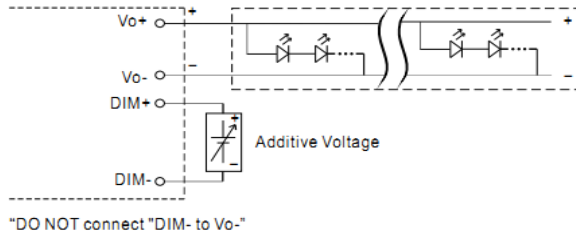

© Applying additive 10V PWM signal (frequency range 300Hz ~ 3KHz):

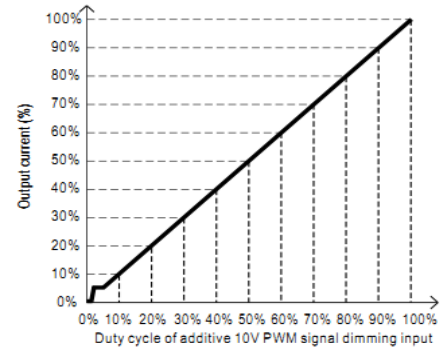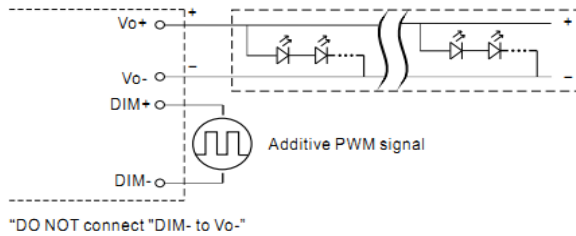

- Note : 1. Min. dimming level is about 8% and the output current is not defined when $0% < I_{out} < 8%$.
 2. The output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC


O/P: DIMMING TEST

Ta: 25°C

1	Dimming voltage	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V
	Output Current	0A	0.130A	0.217A	0.317A	0.424A	0.527A	0.635A	0.739A	0.836A	0.938A	1.038A
	Percentage of rated current	0.00%	12.38%	20.67%	30.19%	40.38%	50.19%	60.48%	70.38%	79.62%	89.33%	98.86%
2	Dimming Duty cycle	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
	Output Current	0A	0.108A	0.213A	0.319A	0.426A	0.531A	0.636A	0.740A	0.844A	0.974A	1.038A
	Percentage of rated current	0.00%	10.29%	20.29%	30.38%	40.57%	50.57%	60.57%	70.48%	80.38%	92.76%	98.86%

TEST RESULT: OK

INPUT FUNCTION TEST

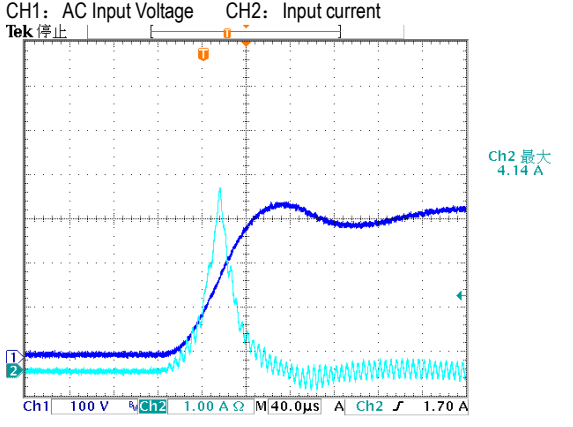NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~295VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	87V~295V
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=305 V O/P: FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230VAC ON: 0.5 Sec OFF: 0.5 Sec 20MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~295 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	0.4A/115VAC 0.16A/230VAC 0.13A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I =0.272A/ 115VAC I =0.139A/ 230VAC I =0.121A/ 277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-CASE: 0.0028 mA N-CASE: 0.0028 mA
5	NO LOAD POWER CONSUMPTION	< 0.5W for Blank-Type < 1.2W for A-Type	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.409W for Blank-Type 0.4611W for A-Type
6	INRUSH CURRENT(Typ)	230V/ 30A Twidth =100 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =4.14A/ 230VAC Twidth =29.6us
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1: AC Input Voltage CH2: Input current</p>  <p>Ch2 最大 4.14 A</p> <p>37.8000µs</p>				
7	EFFICIENCY(Typ)	80%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	82.07%

	<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>Load (%)</th> <th>277V (%)</th> <th>230V (%)</th> <th>115V (%)</th> </tr> </thead> <tbody> <tr> <td>70%</td> <td>76.5</td> <td>78.0</td> <td>79.0</td> </tr> <tr> <td>80%</td> <td>78.5</td> <td>79.8</td> <td>80.5</td> </tr> <tr> <td>90%</td> <td>80.2</td> <td>81.2</td> <td>81.5</td> </tr> <tr> <td>100%</td> <td>81.0</td> <td>82.0</td> <td>82.0</td> </tr> </tbody> </table>			Load (%)	277V (%)	230V (%)	115V (%)	70%	76.5	78.0	79.0	80%	78.5	79.8	80.5	90%	80.2	81.2	81.5	100%	81.0	82.0	82.0
Load (%)	277V (%)	230V (%)	115V (%)																				
70%	76.5	78.0	79.0																				
80%	78.5	79.8	80.5																				
90%	80.2	81.2	81.5																				
100%	81.0	82.0	82.0																				
8	<p>POWER FACTOR</p>	<p>0.95/ 115VAC 0.92/ 230VAC 0.90/ 277VAC</p>	<p>I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C</p>	<p>PF=0.988/ 115VAC PF=0.967/ 230VAC PF=0.935/ 277VAC</p>																			
	<p>P.F vs LOAD</p> <table border="1"> <caption>P.F vs Load Data</caption> <thead> <tr> <th>Load (%)</th> <th>277V</th> <th>230V</th> <th>115V</th> </tr> </thead> <tbody> <tr> <td>70%</td> <td>0.91</td> <td>0.955</td> <td>0.98</td> </tr> <tr> <td>80%</td> <td>0.92</td> <td>0.96</td> <td>0.98</td> </tr> <tr> <td>90%</td> <td>0.93</td> <td>0.965</td> <td>0.98</td> </tr> <tr> <td>100%</td> <td>0.935</td> <td>0.965</td> <td>0.98</td> </tr> </tbody> </table>			Load (%)	277V	230V	115V	70%	0.91	0.955	0.98	80%	0.92	0.96	0.98	90%	0.93	0.965	0.98	100%	0.935	0.965	0.98
Load (%)	277V	230V	115V																				
70%	0.91	0.955	0.98																				
80%	0.92	0.96	0.98																				
90%	0.93	0.965	0.98																				
100%	0.935	0.965	0.98																				
9	<p>TOTAL HARMONIC DISTORTION</p>	<p>THD < 20% (@load ≥ 70% / 115VAC, 230VAC; @load ≥ 75% / 277VAC)</p>	<p>I/P: 115 VAC / 70% LOAD I/P: 230 VAC / 70% LOAD I/P: 277 VAC / 75% LOAD Ta: 25°C</p>	<p>THD=10.11% @70% load /115VAC THD=12.36% @70% load /230VAC THD=15.79% @75% load /277VAC</p>																			
	<p>THD vs LOAD</p> <table border="1"> <caption>THD vs Load Data</caption> <thead> <tr> <th>Load (%)</th> <th>277V (%)</th> <th>230V (%)</th> <th>115V (%)</th> </tr> </thead> <tbody> <tr> <td>70%</td> <td>16.5</td> <td>12.5</td> <td>10.1</td> </tr> <tr> <td>80%</td> <td>15.5</td> <td>11.5</td> <td>9.5</td> </tr> <tr> <td>90%</td> <td>14.5</td> <td>11.0</td> <td>9.0</td> </tr> <tr> <td>100%</td> <td>14.0</td> <td>10.5</td> <td>10.5</td> </tr> </tbody> </table>			Load (%)	277V (%)	230V (%)	115V (%)	70%	16.5	12.5	10.1	80%	15.5	11.5	9.5	90%	14.5	11.0	9.0	100%	14.0	10.5	10.5
Load (%)	277V (%)	230V (%)	115V (%)																				
70%	16.5	12.5	10.1																				
80%	15.5	11.5	9.5																				
90%	14.5	11.0	9.0																				
100%	14.0	10.5	10.5																				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	SHORT CIRCUIT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 90VAC I/P: 295VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q 1 Rated 7A/800V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 608V (2) 556V (3) 580V
2	O/P Diode (MOSFET)	D100 Rated 16A/200V	I/P: High-Line +3V =298V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 161V (2) 160V (3) 158V
3	Control IC	U1 Rated 35V	I/P: High-Line +3V =298V O/P: (1) FULL LOAD (2) Output Short (3) Low Line No Load Ta: 25°C	(1) 14.0V (2) 14.0V (3) 14.0V
4	Clamp Diode	D 1 Rated 1A/1KV	I/P: High-Line +3V = 298V O/P: (1) Full Load input on/off (2) Output Short Ta: 25°C	(1) 526V (2) 514V



SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min	I/P-O/P: 4.2 KVAC/min Ta: 25°C	I/P-O/P: 1.845mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500 VDC Ta: 25°C/70% RH	I/P-O/P: >9999MΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230 VAC/50HZ O/P: FULL/70% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
7	Test by certified Lab & Test Report Prepare			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																								
1	TEMPERATURE RISE TEST	MODEL: IDPC-25-1050 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 33.3℃ 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 50.2℃																																																																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 33.3℃</th> <th>HIGH AMBIENT Ta=50.2℃</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF2</td><td>51.6℃</td><td>66.8℃</td></tr> <tr><td>2</td><td>L2</td><td>53.3℃</td><td>68.4℃</td></tr> <tr><td>3</td><td>C8</td><td>59.0℃</td><td>73.7℃</td></tr> <tr><td>4</td><td>R6</td><td>76.9℃</td><td>91.0℃</td></tr> <tr><td>5</td><td>Q1</td><td>77.8℃</td><td>94.1℃</td></tr> <tr><td>6</td><td>C20</td><td>77.1℃</td><td>91.8℃</td></tr> <tr><td>7</td><td>U1</td><td>70.2℃</td><td>85.7℃</td></tr> <tr><td>8</td><td>D1</td><td>79.9℃</td><td>95.1℃</td></tr> <tr><td>9</td><td>D2</td><td>77.8℃</td><td>92.1℃</td></tr> <tr><td>10</td><td>T1</td><td>78.9℃</td><td>93.0℃</td></tr> <tr><td>11</td><td>D100</td><td>88.8℃</td><td>102.7℃</td></tr> <tr><td>12</td><td>Q100</td><td>82.1℃</td><td>96.9℃</td></tr> <tr><td>13</td><td>R140</td><td>82.1℃</td><td>96.8℃</td></tr> <tr><td>14</td><td>U100</td><td>79.3℃</td><td>94.0℃</td></tr> <tr><td>15</td><td>D200</td><td>70.9℃</td><td>85.3℃</td></tr> <tr><td>16</td><td>D300</td><td>75.7℃</td><td>90.9℃</td></tr> <tr><td>17</td><td>C106</td><td>68.2℃</td><td>83.7℃</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 33.3℃	HIGH AMBIENT Ta=50.2℃	1	LF2	51.6℃	66.8℃	2	L2	53.3℃	68.4℃	3	C8	59.0℃	73.7℃	4	R6	76.9℃	91.0℃	5	Q1	77.8℃	94.1℃	6	C20	77.1℃	91.8℃	7	U1	70.2℃	85.7℃	8	D1	79.9℃	95.1℃	9	D2	77.8℃	92.1℃	10	T1	78.9℃	93.0℃	11	D100	88.8℃	102.7℃	12	Q100	82.1℃	96.9℃	13	R140	82.1℃	96.8℃	14	U100	79.3℃	94.0℃	15	D200	70.9℃	85.3℃	16	D300	75.7℃	90.9℃	17	C106	68.2℃	83.7℃
NO	Position	ROOM AMBIENT Ta= 33.3℃	HIGH AMBIENT Ta=50.2℃																																																																									
1	LF2	51.6℃	66.8℃																																																																									
2	L2	53.3℃	68.4℃																																																																									
3	C8	59.0℃	73.7℃																																																																									
4	R6	76.9℃	91.0℃																																																																									
5	Q1	77.8℃	94.1℃																																																																									
6	C20	77.1℃	91.8℃																																																																									
7	U1	70.2℃	85.7℃																																																																									
8	D1	79.9℃	95.1℃																																																																									
9	D2	77.8℃	92.1℃																																																																									
10	T1	78.9℃	93.0℃																																																																									
11	D100	88.8℃	102.7℃																																																																									
12	Q100	82.1℃	96.9℃																																																																									
13	R140	82.1℃	96.8℃																																																																									
14	U100	79.3℃	94.0℃																																																																									
15	D200	70.9℃	85.3℃																																																																									
16	D300	75.7℃	90.9℃																																																																									
17	C106	68.2℃	83.7℃																																																																									
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 295VAC/90VAC O/P: FULL/80% LOAD Ta= -25℃	TEST: OK																																																																								
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50℃ NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=50℃ HUMIDITY= 95%R.H	TEST: OK																																																																								
4	TEMPERATURE COEFFICIENT	±0.03 %/℃(0~50℃)	I/P: 230 VAC O/P: FULL LOAD	±0.0068%/℃																																																																								
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: AC OFF STATIC		TEST: OK																																																																								
6	THERMAL SHOCK TEST	1. Thermal shock Temperature: -25℃~ +55℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST AC on 3 sec/AC off 1 sec TEST		TEST: OK																																																																								



7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 2G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
8	CAPACITOR LIFE CYCLE	IDPC-25-1050: SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 50 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME	(1) 336460.6 HRS (2) 65578.8 HRS (3) 75531 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 4394.6K hrs min. Telcordia SR-332 (Bellcore) ; 1093.3K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 30,000 hours @ Ta 50°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	CHENZH/ZHUOKB	SKY	LIUWY