



Test Report: LSP-160-24

160W Slim Type with PFC Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	22.8V ~ 25.2V	I/P : 230 VAC O/P : MIN LOAD Ta : 25°C	21.71V~26.49V/230VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	-1% ~ 1%	I/P: 90VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	-0.15%~ +0.22%
3	LINE REGULATION (Max)	-0.3% ~ 0.3%	I/P: 90VAC~ 264VAC O/P:FULL LOAD Ta:25°C	0%~ +0.04%
4	LOAD REGULATION(Max)	-0.5% ~ 0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	-0.04 %~ 0.04%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	4.17%
6	RIPPLE & NOISE(Max)	V1: 240 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	90mVp-p

high frequency :

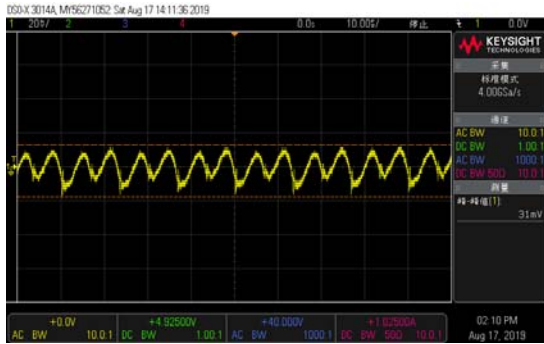

low frequency :

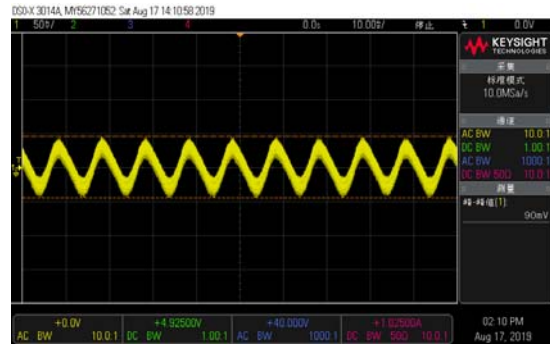

7	SET UP TIME(Max)	230VAC/2000ms 115VAC/300ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 1024ms 115VAC/ 1188ms
---	------------------	-------------------------------	--	----------------------------------

INPUT=230VAC/50HZ @ FULL LOAD







CH1 : Output Voltage CH2 : AC Input Voltage



INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

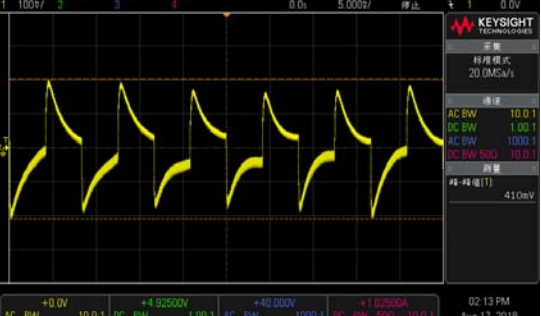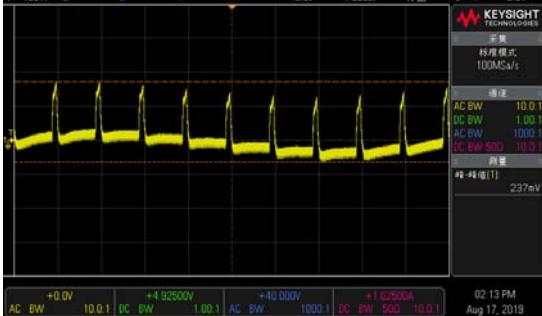


<p>8</p> <p>RISE TIME (Max)</p>	<p>230VAC/80ms 115VAC/80ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 54ms 115VAC/ 54ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p> 	
<p>9</p> <p>HOLD UP TIME (Typ.)</p>	<p>230VAC/10ms 115VAC/10ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 16ms 115VAC/ 15ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p> 	
<p>10</p> <p>DYNAMIC LOAD</p>	<p>V1: 2400mVp-p</p>	<p>I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C</p>	<p>(1) 410mVp-p (2) 237mVp-p</p>
<p>FULL /50% LOAD 50%DUTY / 120HZ</p> 		<p>FULL /50% LOAD 50%DUTY / 1KHZ</p> 	

INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	100VAC-264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	100V-300V
			I/P: LOW-LINE-3V=97VAC HIGH-LINE+15%=300VAC O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ -63 HZ NO DAMAGE	I/P:100VAC ~264 VAC O/P:FULL-MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1.1A 115V/ 2.2A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=0.77A/ 230VAC I=1.56A/ 115VAC
4	LEAKAGE CURRENT	<0.75 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.520mA N-FG : 0.521mA
5	POWER FACTOR (Typ.)	0.94/ 230VAC 0.98/115VAC	I/P : 230 VAC	PF=0.973/230VAC PF=0.991/115VAC
			I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	

P.F vs LOAD

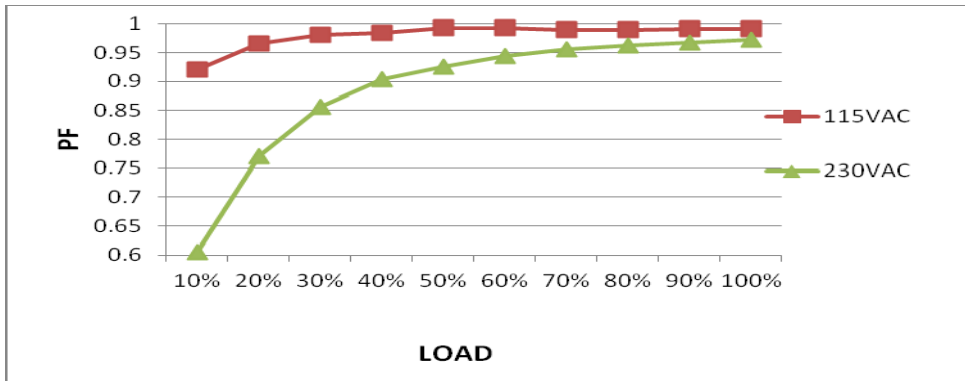

6	EFFICIENCY(Typ.)	93.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	93.71%
---	------------------	-------	---	--------

EFFICIENCY vs LOAD

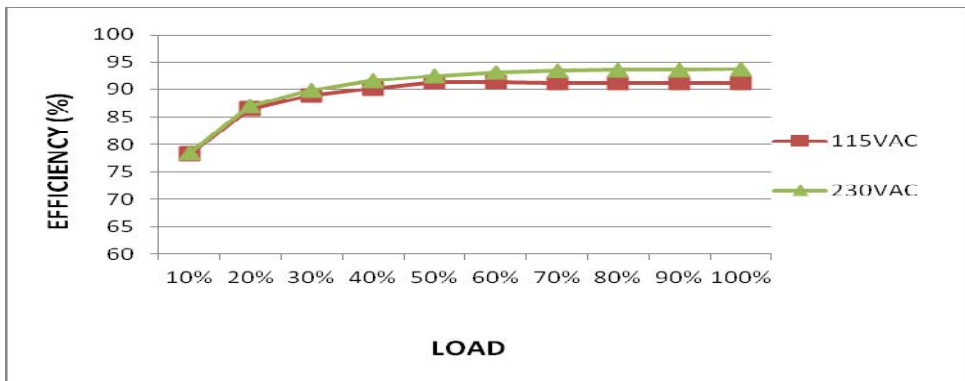

7	INRUSH CURRENT(Typ.)	230V/85A 115V/45A COLD START	I/P : 230 VAC/50Hz I/P : 115 VAC/60Hz O/P : FULL LOAD Ta : 25°C	I=81A/ 230VAC I=42A/ 115VAC T50=384 us/230VAC
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH1 : Input current</p>		<p>INPUT=115VAC/ 60HZ @ FULL LOAD</p> <p>CH2 : AC Input Voltage CH1 : Input current</p>		

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~ 140%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	126.07%/ 264VAC 126.07%/ 230VAC 126.07%/100VAC PROTECTION TYPE : Constant current limiting, continuous increase of load will be hiccup protection, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	26.4V~31.2V	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: MIN LOAD Ta: 25°C	29.3V/ 264VAC 29.3V/ 230VAC 29.3V/ 100VAC 29.3V/230VAC/10%LOAD PROTECTION TYPE : Shut down o/p voltage · re-power on to recovery
3	OVER TEMPERATURE PROTECTION	Protection type : NO DAMAGE	I/P: 264VAC I/P: 100VAC O/P: FULL LOAD	O.T.P. Active OK Protection type : Shut down o/p voltage · re-power on to recovers after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 100VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE PROTECTION TYPE : OK Protection type : Hiccup mode, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC OK CONTACT RATINGS	15VDC/10mA RESISTIVE LOAD	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	TEST : OK

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2 Rated 11A/ 650V	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =267V</p> <p>VDS:</p> <p>O/P: (1)Full Load (1)434V (2)Output Short (2)422V (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (3)434V (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (4)434V (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (5)434V (6)Dynamic Load Full Load/ Min. Load 50%Duty/120Hz (6)434V</p> <p>I/P:Low-Line -3V = 97V</p> <p>VDS:</p> <p>O/P: (1)Full Load (1)422V (2)Output Short (2)398V (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (3)422V (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (4)422V (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (5)422V (6)Dynamic Load Full Load/ Min. Load 50%Duty/120Hz (6)422V</p> <p>Ta:25°C</p>	
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q3 Rated 12A/ 600V	<p>I/P:High-Line +3V =267 V</p> <p>AC ON/OFF</p> <p>O/P: (1)Full Load (1)433V (2)Output Short (2)425V (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (3)429V (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (4)429V (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (5)433V (6)Dynamic Load Full Load/ Min. Load 50%Duty/120Hz (6)429V</p> <p>I/P:Low-Line -3V = 97V</p> <p>AC ON/OFF</p> <p>VDS:</p> <p>O/P: (1)Full Load (1)453V (2)Output Short (2)393V (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (3)453V (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (4)453V (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (5)453V (6)Dynamic Load Full Load/ Min. Load 50%Duty/120Hz (6)453V</p> <p>Ta:25°C</p>	

4	P.F.C DIODE	D6 Rated 8A/600V	<p>I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load Full Load/ Min. Load 50%Duty/120Hz</p> <p>I/P:Low-Line -3V = 97V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load Full Load/ Min. Load 50%Duty/120Hz</p> <p>Ta:25°C</p>	<p>(1) 409V (2) 409V (3) 421V (4) 409V</p> <p>(1) 409V (2) 409V (3) 409V (4) 409V</p>																		
5	SR MOS	<p>Q100 Rated 82A/80V</p> <p>Q104 Rated 82A/80V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =267 V O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load Full Load/ Min. Load 50%Duty/120Hz (7) NO LOAD</p> <p>Ta:25°C</p>	<table border="0"> <tr> <td>Q100:</td> <td>Q103:</td> </tr> <tr> <td>VDS:</td> <td>VDS:</td> </tr> <tr> <td>(1)55.4V</td> <td>(1)55.6V</td> </tr> <tr> <td>(2)9.3V</td> <td>(2)9.5V</td> </tr> <tr> <td>(3)55.4V</td> <td>(3)55.2V</td> </tr> <tr> <td>(4)54.6V</td> <td>(4)55.2V</td> </tr> <tr> <td>(5)54.6V</td> <td>(5)54.8V</td> </tr> <tr> <td>(6)55.4V</td> <td>(6)55.6V</td> </tr> <tr> <td>(7) 52.8V</td> <td>(7) 53.2V</td> </tr> </table>	Q100:	Q103:	VDS:	VDS:	(1)55.4V	(1)55.6V	(2)9.3V	(2)9.5V	(3)55.4V	(3)55.2V	(4)54.6V	(4)55.2V	(5)54.6V	(5)54.8V	(6)55.4V	(6)55.6V	(7) 52.8V	(7) 53.2V
Q100:	Q103:																					
VDS:	VDS:																					
(1)55.4V	(1)55.6V																					
(2)9.3V	(2)9.5V																					
(3)55.4V	(3)55.2V																					
(4)54.6V	(4)55.2V																					
(5)54.6V	(5)54.8V																					
(6)55.4V	(6)55.6V																					
(7) 52.8V	(7) 53.2V																					
6	Input Capacitor Voltage	C5 Rated: 56 μ / 420V	<p>I/P:High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue</p> <p>Ta:25°C</p>	<p>(1)400V (2)391V (3)400V (4)387V</p>																		
7	Control IC Voltage Test	<p>PWM IC U2 Rated 20V</p> <p>PFC IC U1 Rated 20V</p> <p>O/P IC U100 Rated 26 V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =267 V O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin(Low LINE)</p> <p>Ta:25°C</p>	<table border="0"> <tr> <td>U1</td> <td>U2</td> <td>U100</td> </tr> <tr> <td>(1)17.0V</td> <td>16.8V</td> <td>15.0V</td> </tr> <tr> <td>(2)16.4V</td> <td>17.2V</td> <td>6.5V</td> </tr> <tr> <td>(3)16.6V</td> <td>18.0V</td> <td>8.5V</td> </tr> <tr> <td>(4)15.8V</td> <td>16.2V</td> <td>14.3V</td> </tr> <tr> <td>(5)15.4V</td> <td>16.4V</td> <td>15.6V</td> </tr> </table>	U1	U2	U100	(1)17.0V	16.8V	15.0V	(2)16.4V	17.2V	6.5V	(3)16.6V	18.0V	8.5V	(4)15.8V	16.2V	14.3V	(5)15.4V	16.4V	15.6V
U1	U2	U100																				
(1)17.0V	16.8V	15.0V																				
(2)16.4V	17.2V	6.5V																				
(3)16.6V	18.0V	8.5V																				
(4)15.8V	16.2V	14.3V																				
(5)15.4V	16.4V	15.6V																				
8	VCC Diode Peak Voltage	<p>D20 Rated: 1A/200V</p> <p>D201 Rated: 1A/200V</p>	<p>I/P: High-Line +3V = 267VAC O/P: (1) FULL Load input on/off (2) Output Short (3) NO Load (4) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz</p>	<table border="0"> <tr> <td>D20</td> <td>D201</td> </tr> <tr> <td>(1) 125.6V</td> <td>74.3V</td> </tr> <tr> <td>(2) 126.4V</td> <td>57.4V</td> </tr> <tr> <td>(3) 125.6V</td> <td>76.7V</td> </tr> <tr> <td>(4) 125.6V</td> <td>73.5V</td> </tr> </table>	D20	D201	(1) 125.6V	74.3V	(2) 126.4V	57.4V	(3) 125.6V	76.7V	(4) 125.6V	73.5V								
D20	D201																					
(1) 125.6V	74.3V																					
(2) 126.4V	57.4V																					
(3) 125.6V	76.7V																					
(4) 125.6V	73.5V																					

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG : 2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.2KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5KVAC/min Ta:25°C	I/P-O/P: 3.106mA I/P-FG: 3.042mA O/P-FG:2.725mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: >9999MΩ I/P-FG: >9999MΩ O/P-FG: >9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	5mΩ
4	Withstand surge input	I/P: 300VAC*5s	I/P: 310VAC*5s O/P: FULL LOAD/NO LOAD Ta:25°C	NO DAMAGE OK

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 HEAVY INDUSTRY Contact: 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 HEAVY INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 HEAVY INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results please refer to the latest EMC test report.			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																
1	TEMPERATURE RISE TEST	MODEL : LSP-160-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 26.5 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 52.6 °C																																																																																																		
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=26.5 °C</th> <th>HIGH AMBIENT Ta=52.6 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>ZNR1</td><td>40.8°C</td><td>65.5°C</td></tr> <tr><td>2</td><td>RTH2</td><td>62.4°C</td><td>81.9°C</td></tr> <tr><td>3</td><td>L1</td><td>48.7°C</td><td>73.0°C</td></tr> <tr><td>4</td><td>C5</td><td>45.7°C</td><td>70.5°C</td></tr> <tr><td>5</td><td>C6</td><td>45.3°C</td><td>70.1°C</td></tr> <tr><td>6</td><td>C22</td><td>46.8°C</td><td>72.0°C</td></tr> <tr><td>7</td><td>C20</td><td>46.6°C</td><td>71.6°C</td></tr> <tr><td>8</td><td>R20</td><td>49.1°C</td><td>74.5°C</td></tr> <tr><td>9</td><td>BD1</td><td>66.7°C</td><td>90.1°C</td></tr> <tr><td>10</td><td>Q2</td><td>49.9°C</td><td>75.9°C</td></tr> <tr><td>11</td><td>Q3</td><td>50.5°C</td><td>75.7°C</td></tr> <tr><td>12</td><td>D6</td><td>49.4°C</td><td>74.2°C</td></tr> <tr><td>13</td><td>U1</td><td>47.1°C</td><td>72.0°C</td></tr> <tr><td>14</td><td>U2</td><td>46.3°C</td><td>71.6°C</td></tr> <tr><td>15</td><td>T1core</td><td>54.9°C</td><td>80.3°C</td></tr> <tr><td>16</td><td>Q100</td><td>46.1°C</td><td>71.5°C</td></tr> <tr><td>17</td><td>Q104</td><td>46.4°C</td><td>71.7°C</td></tr> <tr><td>18</td><td>J103</td><td>45.3°C</td><td>70.5°C</td></tr> <tr><td>19</td><td>C106</td><td>42.6°C</td><td>67.8°C</td></tr> <tr><td>20</td><td>C107</td><td>43.8°C</td><td>68.9°C</td></tr> <tr><td>21</td><td>RTH3</td><td>46.6°C</td><td>71.5°C</td></tr> <tr><td>22</td><td>C13</td><td>46.8°C</td><td>70.4°C</td></tr> <tr><td>23</td><td>TC</td><td>39.3°C</td><td>64.4°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=26.5 °C	HIGH AMBIENT Ta=52.6 °C	1	ZNR1	40.8°C	65.5°C	2	RTH2	62.4°C	81.9°C	3	L1	48.7°C	73.0°C	4	C5	45.7°C	70.5°C	5	C6	45.3°C	70.1°C	6	C22	46.8°C	72.0°C	7	C20	46.6°C	71.6°C	8	R20	49.1°C	74.5°C	9	BD1	66.7°C	90.1°C	10	Q2	49.9°C	75.9°C	11	Q3	50.5°C	75.7°C	12	D6	49.4°C	74.2°C	13	U1	47.1°C	72.0°C	14	U2	46.3°C	71.6°C	15	T1core	54.9°C	80.3°C	16	Q100	46.1°C	71.5°C	17	Q104	46.4°C	71.7°C	18	J103	45.3°C	70.5°C	19	C106	42.6°C	67.8°C	20	C107	43.8°C	68.9°C	21	RTH3	46.6°C	71.5°C	22	C13	46.8°C	70.4°C	23	TC	39.3°C	64.4°C		
NO	Position	ROOM AMBIENT Ta=26.5 °C	HIGH AMBIENT Ta=52.6 °C																																																																																																	
1	ZNR1	40.8°C	65.5°C																																																																																																	
2	RTH2	62.4°C	81.9°C																																																																																																	
3	L1	48.7°C	73.0°C																																																																																																	
4	C5	45.7°C	70.5°C																																																																																																	
5	C6	45.3°C	70.1°C																																																																																																	
6	C22	46.8°C	72.0°C																																																																																																	
7	C20	46.6°C	71.6°C																																																																																																	
8	R20	49.1°C	74.5°C																																																																																																	
9	BD1	66.7°C	90.1°C																																																																																																	
10	Q2	49.9°C	75.9°C																																																																																																	
11	Q3	50.5°C	75.7°C																																																																																																	
12	D6	49.4°C	74.2°C																																																																																																	
13	U1	47.1°C	72.0°C																																																																																																	
14	U2	46.3°C	71.6°C																																																																																																	
15	T1core	54.9°C	80.3°C																																																																																																	
16	Q100	46.1°C	71.5°C																																																																																																	
17	Q104	46.4°C	71.7°C																																																																																																	
18	J103	45.3°C	70.5°C																																																																																																	
19	C106	42.6°C	67.8°C																																																																																																	
20	C107	43.8°C	68.9°C																																																																																																	
21	RTH3	46.6°C	71.5°C																																																																																																	
22	C13	46.8°C	70.4°C																																																																																																	
23	TC	39.3°C	64.4°C																																																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 123.1%LOAD Ta : 25°C	TEST : OK																																																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/110VAC O/P : 100 %LOAD Ta= -35°C	TEST : OK																																																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C /95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50°C HUMIDITY= 95 %R.H	TEST : OK																																																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	±0.008 %/°C (0-50°C)																																																																																																



6	STORAGE TEMPERATURE TEST	-40-85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC
7	THERMAL SHOCK TEST	-30-50°C	1. Thermal shock Temperature : -35°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 6G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	LSP-160-24 : SUPPOSE C107 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=50 °C LIFE TIME	(1) 27291663HRS (2) 1721988HRS (3) 2349795HRS (4) 3133502HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 699.54 K hrs min. Telcordia SR-332 (Bellcore) 282.71K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/ZHOUBIAO	WENF	LIUWY

2018.4.30 GP-A50-F010