



Test Report: NSP-320-12

320W AC/DC High Reliable Multi-Industries Enclosed Type Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

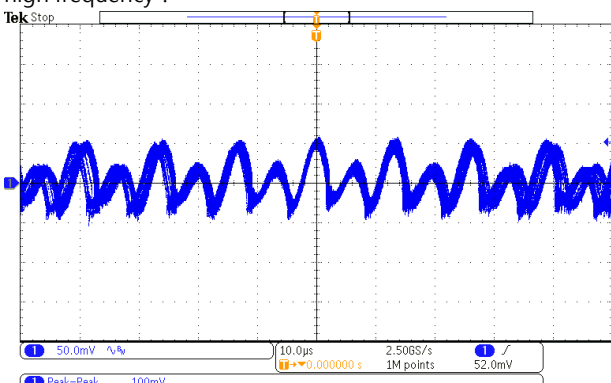
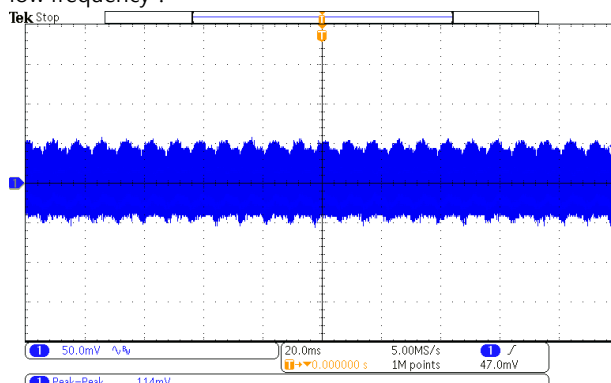
E.M.C. Test

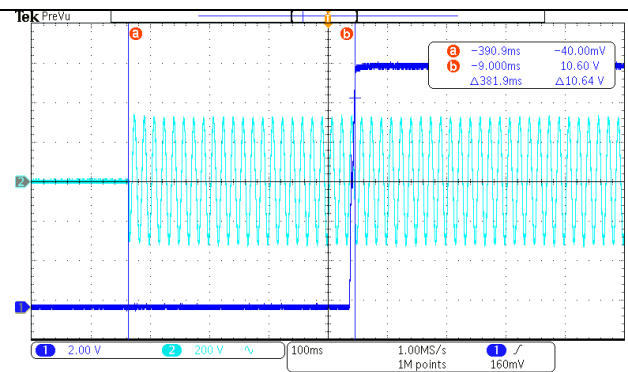
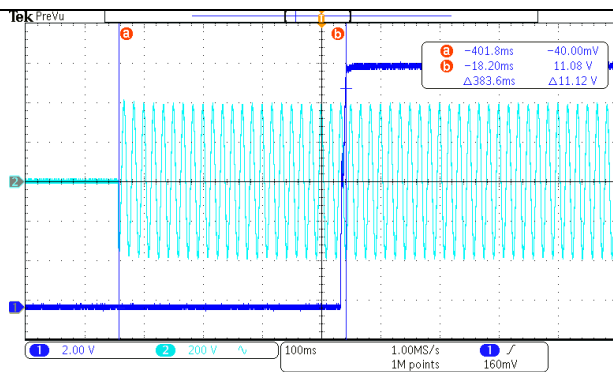
■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST

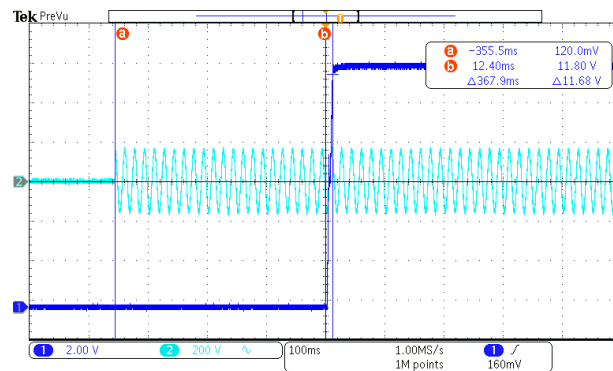
OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 10.8V~14V	I/P : 230 VAC O/P : MIN LOAD Ta : 25°C	10.32V~14.79V/230VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -2%~2%	I/P: 85VAC /305VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1:-0.25%~ 0.25%
3	LINE REGULATION	V1: -0.5%~0.5%	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25°C	V1: 0%~0 %
4	LOAD REGULATION	V1: -0.5%~0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1:-0.16%~0.16%
5	OVER/UNDERSHOOT TEST	< ± 5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	2.6%
6	RIPPLE & NOISE (Max)	V1:200mVp-p	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	V1: 114mVp-p
high frequency :  low frequency : 				
7	SET UP TIME(Max)	277VAC/1000ms 230VAC/1000ms 115VAC/1500ms	I/P : 277 VAC I/P : 230 VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	277VAC/383.6ms 230VAC/381.9ms 115VAC/367.9ms
INPUT=277VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage			INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	



INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage



8

RISE TIME (Max)

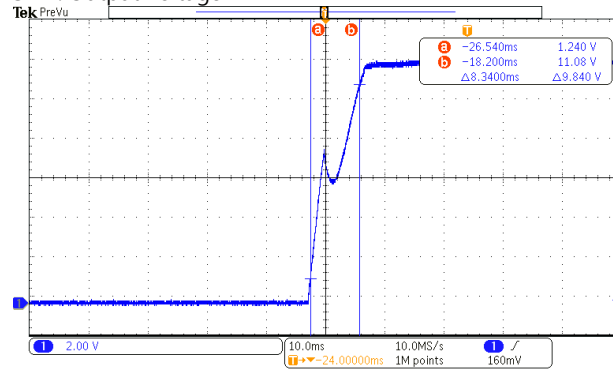
277VAC/80ms
230VAC/80ms
115VAC/80ms

I/P : 277 VAC
I/P : 230 VAC
I/P : 115VAC
O/P : FULL LOAD
Ta : 25°C

277VAC/8.34ms
230VAC/7.74ms
115VAC/7.94ms

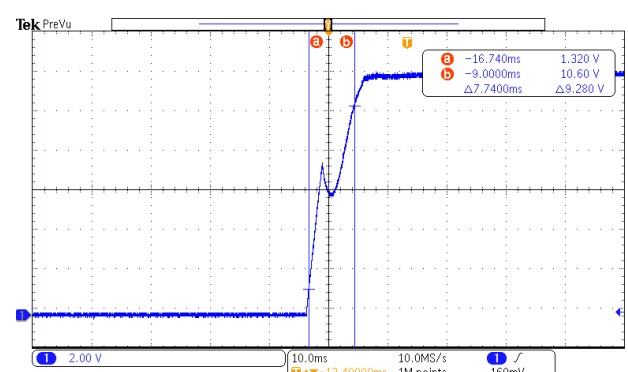
INPUT=277VAC/60HZ @ FULL LOAD

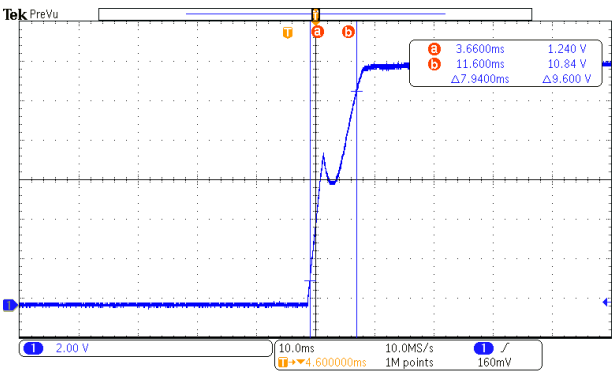
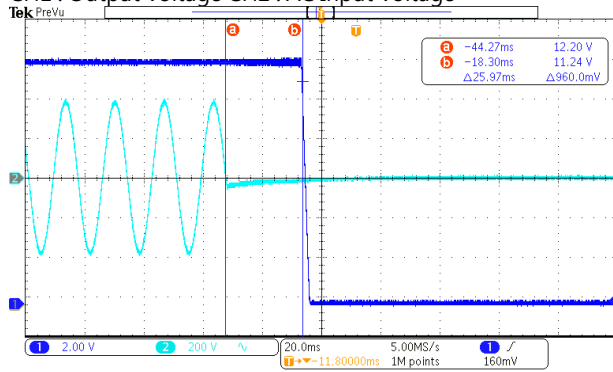
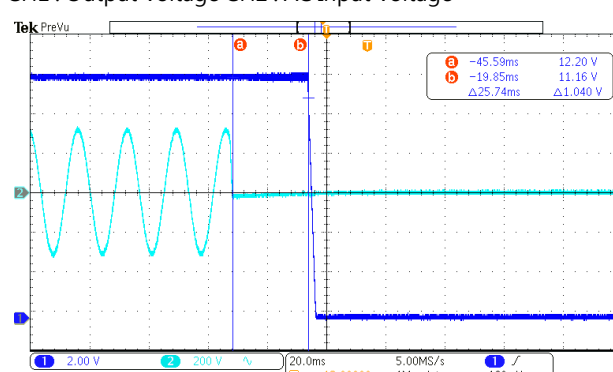
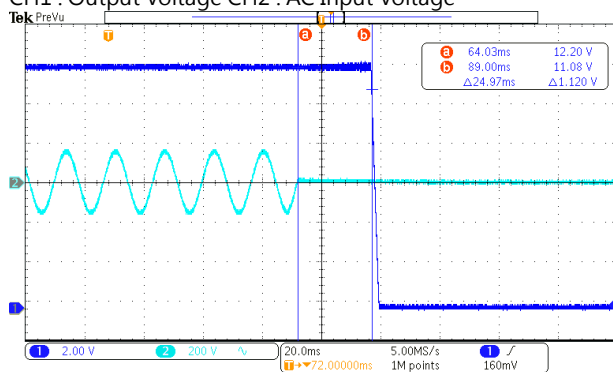
CH1 : Output Voltage

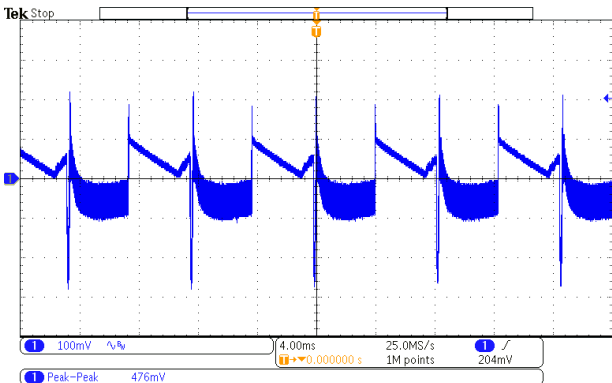
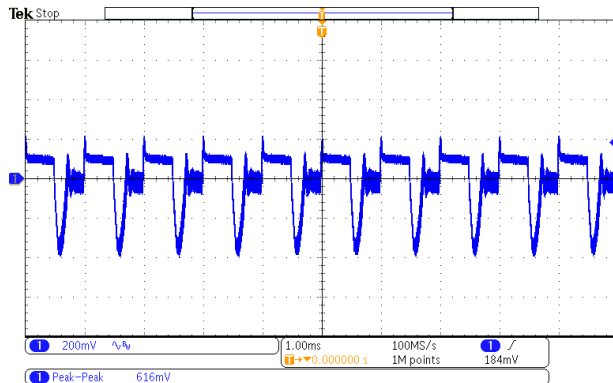


INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage

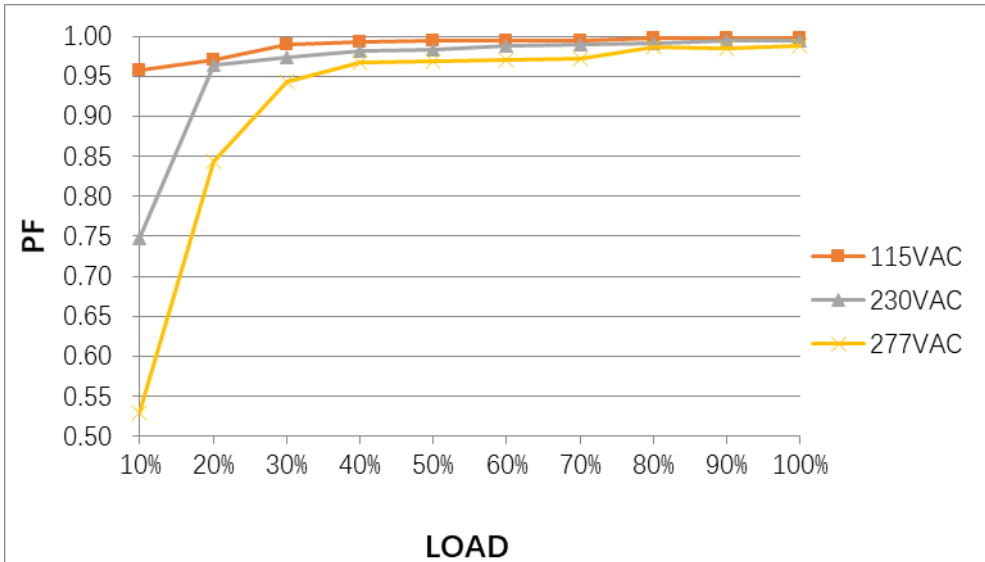
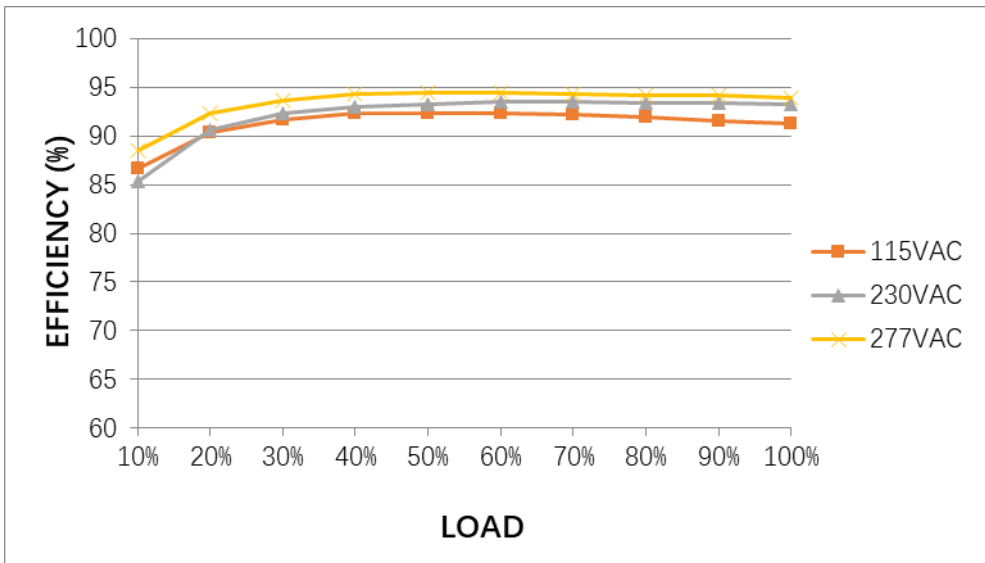


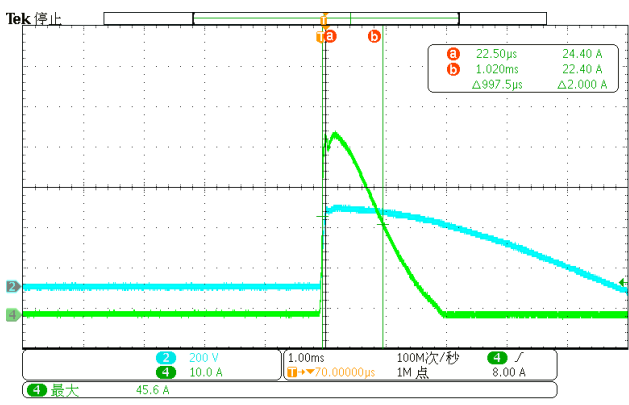
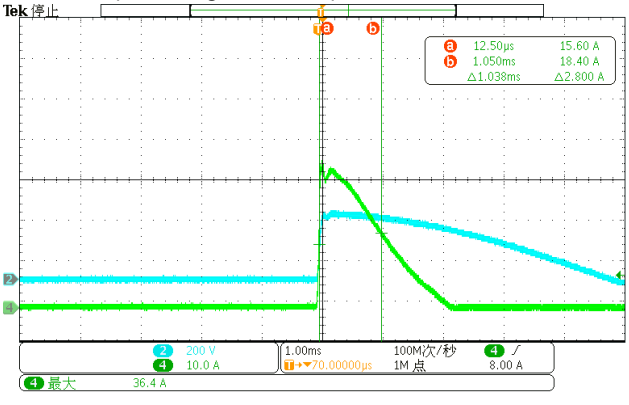
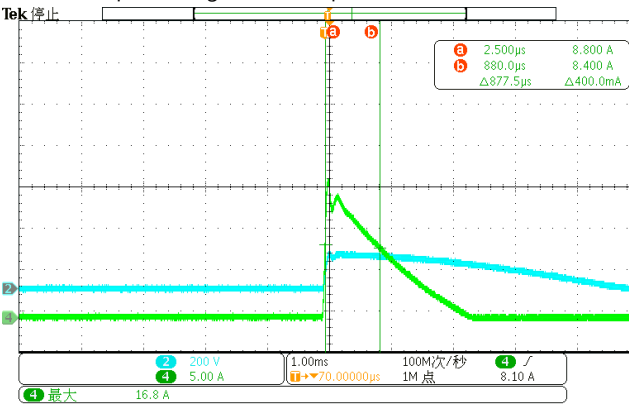
	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage 			
9	HOLD UP TIME (Typ.)	277VAC/16ms 230VAC/16ms 115VAC/16ms	I/P : 277VAC I/P : 230 VAC I/P : 115VAC O/P : FULL LOAD Ta : 25°C	277VAC/25.97ms 230VAC/25.74ms 115VAC/24.97 ms
	INPUT=277VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage  INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 			
	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 			
10	DYNAMIC LOAD	V1:1200mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	476mVp-p 616mVp-p

FULL /50% LOAD 50%DUTY / 120HZ  FULL /50% LOAD 50%DUTY / 1KHZ 				
11	TRANSIENT RECOVERY TIME	V1:1200mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	236mVp-p 104us

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~305VAC 120VDC~ 431VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD Ta:25°C	(1) 80V~308V (2) 117Vdc~434Vdc/FULL LOAD 117 Vdc~434Vdc/50% LOAD (3) 117Vdc~ 434Vdc/FULL LOAD 117Vdc~ 434 Vdc/50% LOAD
			I/P: LOW-LINE-3V=82 V HIGH-LINE+10V=315 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:PASS
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 85VAC ~305 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: PASS
3	INPUT CURRENT (Typ.)	277VAC/1.4A 230VAC/1.6A 115VAC/3.2A	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =1.22A/ 277VAC I =1.47A/ 230VAC I =3.00A/ 115VAC
4	LEAKAGE CURRENT	Earth leakage current <350μA(rms)@277Vac, touch current<100μA(rms) @ 277Vac	I/P : 277 VAC O/P : Min LOAD Ta : 25°C	262μA for Earth 26μA for touch
5	POWER FACTOR (Typ.)	0.90/ 277VAC 0.93/ 230VAC 0.98/115VAC	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC	PF=0.989/277VAC PF=0.994/230VAC PF=0.997/115VAC

			O/P : FULL LOAD Ta : 25°C																																													
	P.F vs LOAD <table><caption>P.F vs LOAD Data (Approximate)</caption><thead><tr><th>LOAD</th><th>115VAC</th><th>230VAC</th><th>277VAC</th></tr></thead><tbody><tr><td>10%</td><td>0.95</td><td>0.75</td><td>0.55</td></tr><tr><td>20%</td><td>0.97</td><td>0.95</td><td>0.85</td></tr><tr><td>30%</td><td>0.98</td><td>0.97</td><td>0.95</td></tr><tr><td>40%</td><td>0.99</td><td>0.98</td><td>0.97</td></tr><tr><td>50%</td><td>0.99</td><td>0.99</td><td>0.98</td></tr><tr><td>60%</td><td>0.99</td><td>0.99</td><td>0.98</td></tr><tr><td>70%</td><td>0.99</td><td>0.99</td><td>0.98</td></tr><tr><td>80%</td><td>0.99</td><td>0.99</td><td>0.99</td></tr><tr><td>90%</td><td>0.99</td><td>0.99</td><td>0.99</td></tr><tr><td>100%</td><td>1.00</td><td>1.00</td><td>1.00</td></tr></tbody></table>				LOAD	115VAC	230VAC	277VAC	10%	0.95	0.75	0.55	20%	0.97	0.95	0.85	30%	0.98	0.97	0.95	40%	0.99	0.98	0.97	50%	0.99	0.99	0.98	60%	0.99	0.99	0.98	70%	0.99	0.99	0.98	80%	0.99	0.99	0.99	90%	0.99	0.99	0.99	100%	1.00	1.00	1.00
LOAD	115VAC	230VAC	277VAC																																													
10%	0.95	0.75	0.55																																													
20%	0.97	0.95	0.85																																													
30%	0.98	0.97	0.95																																													
40%	0.99	0.98	0.97																																													
50%	0.99	0.99	0.98																																													
60%	0.99	0.99	0.98																																													
70%	0.99	0.99	0.98																																													
80%	0.99	0.99	0.99																																													
90%	0.99	0.99	0.99																																													
100%	1.00	1.00	1.00																																													
6	EFFICIENCY(Typ.)	93.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	93.62%																																												
	EFFICIENCY vs LOAD <table><caption>EFFICIENCY vs LOAD Data (Approximate)</caption><thead><tr><th>LOAD</th><th>115VAC</th><th>230VAC</th><th>277VAC</th></tr></thead><tbody><tr><td>10%</td><td>85</td><td>85</td><td>88</td></tr><tr><td>20%</td><td>90</td><td>91</td><td>93</td></tr><tr><td>30%</td><td>92</td><td>93</td><td>94</td></tr><tr><td>40%</td><td>92</td><td>93</td><td>94</td></tr><tr><td>50%</td><td>92</td><td>93</td><td>94</td></tr><tr><td>60%</td><td>92</td><td>93</td><td>94</td></tr><tr><td>70%</td><td>92</td><td>93</td><td>94</td></tr><tr><td>80%</td><td>92</td><td>93</td><td>94</td></tr><tr><td>90%</td><td>91</td><td>93</td><td>94</td></tr><tr><td>100%</td><td>91</td><td>93</td><td>94</td></tr></tbody></table>				LOAD	115VAC	230VAC	277VAC	10%	85	85	88	20%	90	91	93	30%	92	93	94	40%	92	93	94	50%	92	93	94	60%	92	93	94	70%	92	93	94	80%	92	93	94	90%	91	93	94	100%	91	93	94
LOAD	115VAC	230VAC	277VAC																																													
10%	85	85	88																																													
20%	90	91	93																																													
30%	92	93	94																																													
40%	92	93	94																																													
50%	92	93	94																																													
60%	92	93	94																																													
70%	92	93	94																																													
80%	92	93	94																																													
90%	91	93	94																																													
100%	91	93	94																																													
7	NO LOAD POWER CONSUMPTION(Typ.)	Remote Power ON : 3W/277VAC 3W/230VAC 3W/115VAC Remote Power OFF : 0.50W/277VAC 0.50W/230VAC 0.30W/115VAC	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : RC ON/RC OFF Ta : 25°C	Remote Power ON : 1.47W/277VAC 1.62W/230VAC 1.56W/115VAC Remote Power OFF : 0.42W/277VAC 0.31W/230VAC 0.13W/115VAC																																												

8	INRUSH CURRENT(Typ.)	277VAC/50A 230VAC/40A 115VAC/20A COLD START	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =45.6A/ 277 VAC T50=997us/277 VAC I =36.4A/ 230 VAC T50=1038us/230 VAC I =16.8A/ 115 VAC T50=997us/115 VAC
INPUT=277VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current  INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current  INPUT=115VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current 				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~200%	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: TESTING Ta:25°C	120.5%/ 305VAC 120.8%/ 230VAC 120.6%/85VAC Protection type : 1、Normally works within 105 ~ 200% rated output power for more than 5 seconds and then constant current limiting without shutdown($V_{out}>30\%$), recovers automatically after fault condition is removed, or shut

				down o/p voltage when $V_{out} < 30\%$, AC re-power on to recover 2 >200% rated power, constant current limiting ($V_{out} > 30\%$) with auto-recovery after fault condition is removed,
2	OVER VOLTAGE PROTECTION	15V~19V	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	16.8V/ 305VAC 16.8V/ 230VAC 16.8V/ 85VAC Protection type : Shut down o/p voltage, AC re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type : Shut down o/p voltage, AC re-power on to recover	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, AC re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Protection type : Constant current limiting for more than 5 seconds ($V_{out} < 30\%$) and then shut down a/p voltage, AC re-power on to recover

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT						
1	REMOTE CONTROL	Power ON: Pin5 and Pin6 open or keep 0~0.8Vdc Power OFF: Pin5 and Pin6 keep 3.3~10Vdc	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>						
2	REMOTE SENSE	S+ / S- The remote sensing compensates voltage drop on the load wiring up to 0.3V	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>						
3	DC OK SIGNAL	15Vdc/10mA resistive load <table border="1"><tr><td>PSU Vo Status</td><td>Photo transistor</td></tr><tr><td>POWER ON</td><td>Conduct(Low impedance)</td></tr><tr><td>POWER OFF</td><td>Open(High impedance)</td></tr></table> Optocoupler Rating(max.) 15Vdc/10mA resistive load	PSU Vo Status	Photo transistor	POWER ON	Conduct(Low impedance)	POWER OFF	Open(High impedance)	I/P:230VAC O/P:FULL LOAD Ta:25°C	TEST: <u>OK</u>
PSU Vo Status	Photo transistor									
POWER ON	Conduct(Low impedance)									
POWER OFF	Open(High impedance)									

4	FAN CONTROL & NOISE	(1) Fan ON/OFF control : RTH4 ≥ 50°C ± 10°C FAN ON RTH4 ≤ 40°C ± 10°C FAN OFF (2) FAN NOISE : < 40dB@100% load with Ta=25°C	I/P: 230VAC O/P: FULL LOAD	TEST: (1) <u>ok</u> (2) <u>39.6</u> dB Ta: 25°C
5	PEAK Power	I/P: 100/305VAC O/P: -----100VAC ———200VAC		TEST: <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q6 Rated 650V/15A	AC ON/OFF I/P:High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1) 496V (2) 520V (3) 504V (4) 500V (5) 504V (6) 504V (7) 520V
2	Diode Peak Voltage	Q101 Rated 80 A/60 V	AC ON/OFF I/P:High-Line +3V =308 V O/P: (1)Full Load (2)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (3)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz	Q101: VDS: (1) 36.4V (2) 36.4V (3) 36V (4) 9.6V

			(4)0%→400% Load. Ta:25°C	
3	Control IC Voltage Test	PFC/PWM IC U2 Rated 9.6V~ 36 V O/P IC U101 Rated 3V~ 30 V	AC ON/OFF I/P:High-Line +3V =308 V O/P(1)FULL LOAD (2) Output Short (3)O.L.P Ta:25°C	U2 (1) 19.4V (2) 19.4V (3) 19.4V U101 (1) 13.2V (2) 12.6V (3) 12.6V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.2 K VAC/min I/P-FG : 2.1 K VAC/min O/P-FG: 1.5 KVAC/min	I/P-O/P: 4.62 KVAC/min I/P-FG: 2.52 KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P - O/P: 2.381 mA I / P - F G : 2.167 mA O / P - F G : 1.875 m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500 VDC>100MΩ I/P - FG : 500 VDC>100MΩ O/P-FG: 500 VDC >100MΩ	I/P-O/P: 500 VDC I/P - FG : 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P - O/P: 9999 MΩ I / P - F G : 9999 MΩ O / P - F G : 9999 MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	11mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■□PASS □FAIL
2	CONDUCTION	BS EN/EN55032(CISPR32),CNS 15936 EN/EN55014-1(CISPR14-1) EN/EN55011(CISPR11)	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032(CISPR32),CNS 15936 EN/EN55014-1(CISPR14-1) EN/EN55011(CISPR11)	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

5	E.F.T	EN61000-4-4 INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																				
1	TEMPERATURE RISE TEST	MODEL : NSP-320-12 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=25.5 °C 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=62.3°C																																																																																						
		<table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta=25.5°C</th><th>HIGH AMBIENT Ta=62.3°C</th></tr><tr><td>1</td><td>C1</td><td>33.3°C</td><td>70.5°C</td></tr><tr><td>2</td><td>LF1</td><td>39.6°C</td><td>77.2°C</td></tr><tr><td>3</td><td>C2</td><td>37.5°C</td><td>74.5°C</td></tr><tr><td>4</td><td>LF2</td><td>39.1°C</td><td>76.4°C</td></tr><tr><td>5</td><td>C10</td><td>36.6°C</td><td>74.2°C</td></tr><tr><td>6</td><td>L1</td><td>52.4°C</td><td>92.9°C</td></tr><tr><td>7</td><td>BD1</td><td>43.7°C</td><td>79.5°C</td></tr><tr><td>8</td><td>C5</td><td>41.0°C</td><td>77.5°C</td></tr><tr><td>9</td><td>Q2</td><td>47.2°C</td><td>83.5°C</td></tr><tr><td>10</td><td>D8</td><td>47.5°C</td><td>83.8°C</td></tr><tr><td>11</td><td>Q5</td><td>46.8°C</td><td>85.9°C</td></tr><tr><td>12</td><td>U2</td><td>44.1°C</td><td>82.2°C</td></tr><tr><td>13</td><td>C36</td><td>41.2°C</td><td>78.9°C</td></tr><tr><td>14</td><td>T1coil</td><td>53.0°C</td><td>93.6°C</td></tr><tr><td>15</td><td>C201</td><td>39.6°C</td><td>75.7°C</td></tr><tr><td>16</td><td>U100</td><td>60.2°C</td><td>96.2°C</td></tr><tr><td>17</td><td>Q103</td><td>51.2°C</td><td>87.7°C</td></tr><tr><td>18</td><td>C105</td><td>45.7°C</td><td>82.1°C</td></tr><tr><td>19</td><td>RTH3</td><td>49.0°C</td><td>85.1°C</td></tr><tr><td>20</td><td>TSW1</td><td>47.2°C</td><td>87.7°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta=25.5°C	HIGH AMBIENT Ta=62.3°C	1	C1	33.3°C	70.5°C	2	LF1	39.6°C	77.2°C	3	C2	37.5°C	74.5°C	4	LF2	39.1°C	76.4°C	5	C10	36.6°C	74.2°C	6	L1	52.4°C	92.9°C	7	BD1	43.7°C	79.5°C	8	C5	41.0°C	77.5°C	9	Q2	47.2°C	83.5°C	10	D8	47.5°C	83.8°C	11	Q5	46.8°C	85.9°C	12	U2	44.1°C	82.2°C	13	C36	41.2°C	78.9°C	14	T1coil	53.0°C	93.6°C	15	C201	39.6°C	75.7°C	16	U100	60.2°C	96.2°C	17	Q103	51.2°C	87.7°C	18	C105	45.7°C	82.1°C	19	RTH3	49.0°C	85.1°C	20	TSW1	47.2°C	87.7°C
NO	Position	ROOM AMBIENT Ta=25.5°C	HIGH AMBIENT Ta=62.3°C																																																																																					
1	C1	33.3°C	70.5°C																																																																																					
2	LF1	39.6°C	77.2°C																																																																																					
3	C2	37.5°C	74.5°C																																																																																					
4	LF2	39.1°C	76.4°C																																																																																					
5	C10	36.6°C	74.2°C																																																																																					
6	L1	52.4°C	92.9°C																																																																																					
7	BD1	43.7°C	79.5°C																																																																																					
8	C5	41.0°C	77.5°C																																																																																					
9	Q2	47.2°C	83.5°C																																																																																					
10	D8	47.5°C	83.8°C																																																																																					
11	Q5	46.8°C	85.9°C																																																																																					
12	U2	44.1°C	82.2°C																																																																																					
13	C36	41.2°C	78.9°C																																																																																					
14	T1coil	53.0°C	93.6°C																																																																																					
15	C201	39.6°C	75.7°C																																																																																					
16	U100	60.2°C	96.2°C																																																																																					
17	Q103	51.2°C	87.7°C																																																																																					
18	C105	45.7°C	82.1°C																																																																																					
19	RTH3	49.0°C	85.1°C																																																																																					
20	TSW1	47.2°C	87.7°C																																																																																					

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 120.8 % LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 100 % LOAD Ta= -35 °C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C/95 %R.H NO DAMAGE	I/P : 315 VAC O/P : FULL LOAD Ta= 60°C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.05 %/°C(0~60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.0067 %/°C(0~60°C)
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/output condition : STATIC	
7	THERMAL SHOCK TEST	-30~60°C	1. Thermal shock Temperature : -35°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60°C LIFE TIME		(1) 564504.5HRS (2) 51298.4HRS (3) 98473.1HRS (4) 170307.3HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1699.1K hrs min. Telcordia SR-332 (Bellcore) ; 257.1K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Hanxr	Liutt	Wangzd

2020.10.1 TAG-QA-009