



# Test Report: NTU-3200-224

---

3200W High Reliable True Sine Wave with UPS DC-AC Power Inverter

- **DESIGN VERIFY TEST**
  - Output Function Test
  - Input Function Test
  - Protection Function Test
  - Control Function Test
  - APPLICATION Test
  - Component Stress Test
- **SAFETY & E.M.C. TEST**
  - Safety Test
  - E.M.C. Test
- **RELIABILITY TEST**
  - ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RATED POWER	3200W	IP: 24VDC Ta:25°C	<u>3270</u> W
2	MAXIMUM OUTPUT POWER (TYP)	(1)3680W/180sec. (2)4800w/10sec (3)SURGE POWER 6400W FOR 30CYCLE Vin (30 ± 5 CYCLE)	IP: 25VDC OP:TESTING LOAD Ta:25°C	(1) <u>229.1</u> V / <u>15.8</u> A / <u>180.1</u> Sec (2) <u>228.4</u> V / <u>19.9</u> A / <u>10.1</u> Sec (3) <u>226.5</u> V / <u>27.7</u> A / <u>29</u> Cycle

CH3:O/P VAC CH4:O/P IAC

Fig1

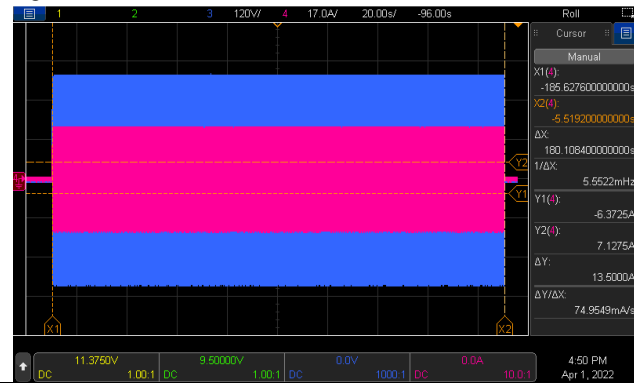


Fig2


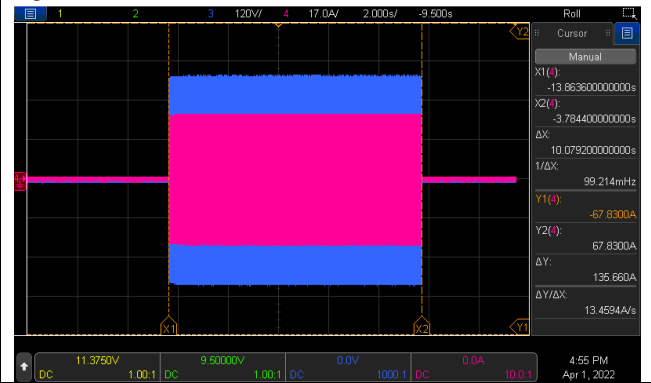


Fig3

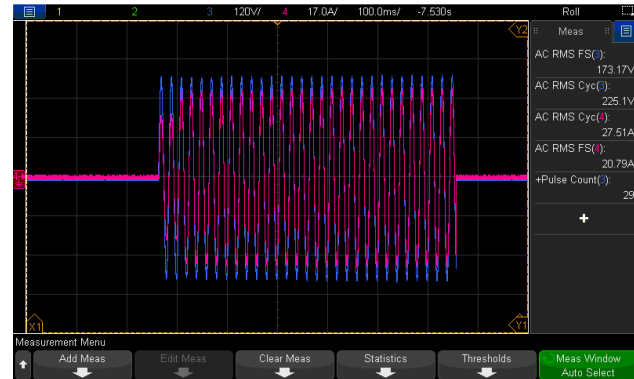

3	AC Voltage	200 / 220 / 230 / 240Vac selectable by DIP S.W	IP: 24VDC OP: FULL LOAD Ta:25°C	DIP S.W 200VAC: <u>197.95</u> V DIP S.W 220VAC: <u>217.89</u> V DIP S.W 230VAC: <u>227.85</u> V DIP S.W 240VAC: <u>237.79</u> V
4	FREQUENCY	50/60Hz (±0.1HZ) selectable by DIP S.W	IP: 24VDC OP: FULL LOAD Ta:25°C	DIP S.W 50HZ: <u>50.04</u> HZ DIP S.W 60HZ: <u>59.96</u> HZ
5	WAVEFORM	True sine wave (THD<3%)	IP: 25VDC OP: 2400W (1) Vo(min) (2) Vo(nor) (3) Vo(max) Ta:25°C	(1) <u>1.49</u> % / Vo(min) (2) <u>1.42</u> % / Vo(nor) (3) <u>1.46</u> % / Vo(max)

CH3:O/P VAC CH4:O/P IAC

Fig1

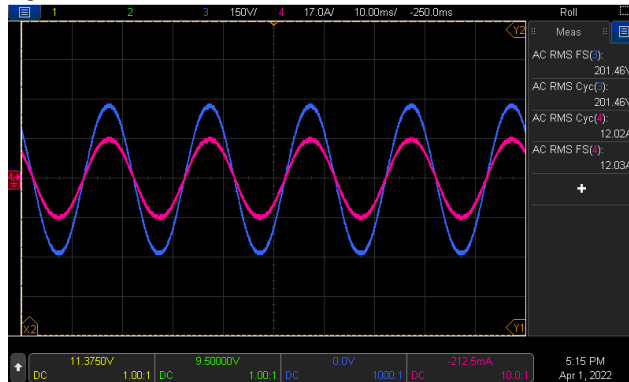


Fig2


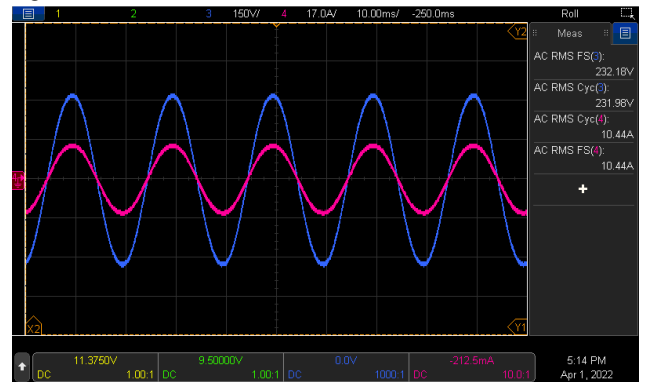


Fig3

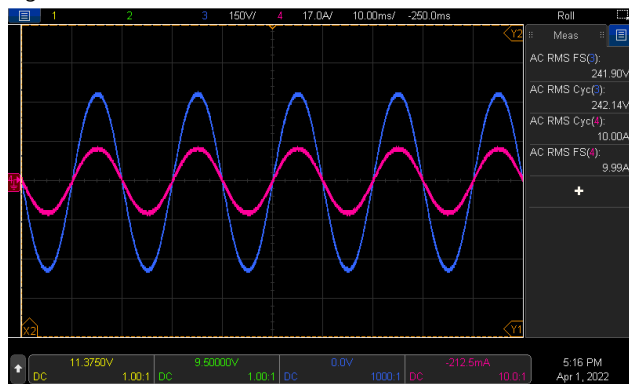

6	AC REGULATION	±3%	IP: 25VDC OP: 2400W Ta:25°C	<u>-0.9</u> %
7	Overshoot /Undershoot	<±10%	IP: 24VDC OP: (1) full load turn on (2) no load turn on (3) full /no load change Ta:25°C	(1) <u>-4.6</u> % (2) <u>1.1</u> % (3) <u>-3.0</u> %
8	O/P voltage DC offset	Vin(nor)= <u>24</u> V · Vo<200mV · no load : <u>78</u> mV / full load: <u>77</u> mV		

9	LED STATUS	<ul style="list-style-type: none"> <li> <b>Statas test</b> <table border="1"> <thead> <tr> <th>LED</th> <th>Statas</th> <th>RESULT</th> </tr> </thead> <tbody> <tr> <td>Green ●</td> <td>Inverter OK</td> <td>OK</td> </tr> <tr> <td>Orange ●</td> <td>Remote off</td> <td>OK</td> </tr> <tr> <td>Orange ☀</td> <td>No AC Output at Saving mode</td> <td>OK</td> </tr> <tr> <td>Red ●</td> <td>Inverter Fail</td> <td>OK</td> </tr> </tbody> </table> </li> <li> <b>DC Input test</b> <table border="1"> <thead> <tr> <th>LED</th> <th>Battery RANGE</th> <th>RESULT</th> </tr> </thead> <tbody> <tr> <td>Green ●</td> <td>25.0~31.0 Vdc±0.5v</td> <td>25.03Vdc ~ 30.85 Vdc</td> </tr> <tr> <td>Orange ●</td> <td>22.0~25.0Vdc ±0.5v</td> <td>22.05Vdc ~ 24.86 Vdc</td> </tr> <tr> <td>Red ●</td> <td>&lt;22.0 Vdc ±0.5v &gt; 31.0vdc±0.5v</td> <td>&lt; 21.95Vdc &gt; 31.06 Vdc</td> </tr> </tbody> </table> </li> <li> <b>Load test</b> <table border="1"> <thead> <tr> <th>LED</th> <th>LOAD RANGE</th> <th>RESULT</th> </tr> </thead> <tbody> <tr> <td>Green ●</td> <td>Min. load ~ 40%±5% LOAD</td> <td>Min. load ~ 38.4 %</td> </tr> <tr> <td>Orange ●</td> <td>40%±5% ~ 80%±5% LOAD</td> <td>41.6% ~78.8%</td> </tr> <tr> <td>Red ●</td> <td>≥ 80%±5% LOAD</td> <td>≥ 81.6%</td> </tr> </tbody> </table> </li> <li> <b>AC Input</b> <table border="1"> <thead> <tr> <th>LED</th> <th>LOAD RANGE</th> <th>RESULT</th> </tr> </thead> <tbody> <tr> <td>Green ●</td> <td>Utility OK</td> <td>OK</td> </tr> <tr> <td>Green ☀</td> <td>Utility error</td> <td>OK</td> </tr> <tr> <td>Colorless ○</td> <td>Utility disconnected</td> <td>OK</td> </tr> </tbody> </table> </li> </ul>	LED	Statas	RESULT	Green ●	Inverter OK	OK	Orange ●	Remote off	OK	Orange ☀	No AC Output at Saving mode	OK	Red ●	Inverter Fail	OK	LED	Battery RANGE	RESULT	Green ●	25.0~31.0 Vdc±0.5v	25.03Vdc ~ 30.85 Vdc	Orange ●	22.0~25.0Vdc ±0.5v	22.05Vdc ~ 24.86 Vdc	Red ●	<22.0 Vdc ±0.5v > 31.0vdc±0.5v	< 21.95Vdc > 31.06 Vdc	LED	LOAD RANGE	RESULT	Green ●	Min. load ~ 40%±5% LOAD	Min. load ~ 38.4 %	Orange ●	40%±5% ~ 80%±5% LOAD	41.6% ~78.8%	Red ●	≥ 80%±5% LOAD	≥ 81.6%	LED	LOAD RANGE	RESULT	Green ●	Utility OK	OK	Green ☀	Utility error	OK	Colorless ○	Utility disconnected	OK
		LED	Statas	RESULT																																																	
		Green ●	Inverter OK	OK																																																	
		Orange ●	Remote off	OK																																																	
		Orange ☀	No AC Output at Saving mode	OK																																																	
		Red ●	Inverter Fail	OK																																																	
		LED	Battery RANGE	RESULT																																																	
		Green ●	25.0~31.0 Vdc±0.5v	25.03Vdc ~ 30.85 Vdc																																																	
		Orange ●	22.0~25.0Vdc ±0.5v	22.05Vdc ~ 24.86 Vdc																																																	
		Red ●	<22.0 Vdc ±0.5v > 31.0vdc±0.5v	< 21.95Vdc > 31.06 Vdc																																																	
		LED	LOAD RANGE	RESULT																																																	
		Green ●	Min. load ~ 40%±5% LOAD	Min. load ~ 38.4 %																																																	
		Orange ●	40%±5% ~ 80%±5% LOAD	41.6% ~78.8%																																																	
		Red ●	≥ 80%±5% LOAD	≥ 81.6%																																																	
		LED	LOAD RANGE	RESULT																																																	
Green ●	Utility OK	OK																																																			
Green ☀	Utility error	OK																																																			
Colorless ○	Utility disconnected	OK																																																			

**INPUT FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	VOLTAGE RANGE (TYP)	20VDC~33VDC	IP: TESTING OP:NO LOAD/FULL LOAD Ta:25°C	<u>20.01</u> VDC~ <u>32.98</u> VDC/NO LOAD <u>20.04</u> VDC~ <u>32.98</u> VDC/FULL LOAD

			I/P: LOW-LINE=21V HIGH-LINE=32.5V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON:30Sec OFF:30Sec 10MIN (POWER ON/OFF NO DAMAGE) I/P: 24VDC O/P:FULL LOAD ON:30ec OFF:30ec 12Hr (POWER ON/OFF NO DAMAGE)	10MIN Test: <u>OK</u> 12Hr Test: <u>OK</u>
2	DC CURRENT (TYP)	160A	IP: 24VDC OP:FULL LOAD Ta:25°C	<u>144.5</u> A
3	NO LOAD DISSIPATION	$\leq 15W$ @ saving mode $\leq 55W$ @NON-Saving Mode	IP: 24VDC OP:NO LOAD Ta:25°C	<u>6.04</u> W @ saving mode <u>51.86</u> W @NON- Saving Mode
4	SAVING MODE TO NORMAL	$P_o \geq 25W$	IP: 24VDC OP: TESTING LOAD Ta:25°C	$\geq$ <u>22</u> W
5	NORMAL TO SAVING MODE	$P_o \leq 10W$	IP: 24VDC OP: TESTING LOAD Ta:25°C	$\leq$ <u>15</u> W
6	OFF MODE CURRENT DRAW (Typ.)	$\leq 2mA$	IP: 24VDC OP: Sw off Ta:25°C	<u>1.1</u> mA
7	EFFICIENCY(TYP)	2400W /92%	IP:25VDC OP: $P_o=2400W$ Ta:25°C	<u>92.45</u> %

AC UPS MODE(Only for NTU)

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	AC Taper Voltage Range	AC input high / low line limit:No Load			
		AC Voltage	limit	Voltage Range	RESULT
		230V	High limit (To INV mode)	Vac > 267V±8V	<u>264.9</u> V
			Recovery to high (To AC mode)	Vac < 260V±8V	<u>257.32</u> V
			Low limit (To INV mode)	Vac < 193V±8V	<u>190.7</u> V
Recovery to low (To AC mode)	Vac > 200V±8V		<u>199.7</u> V		
2	FREQUENCY RANGE	45 ~ 65Hz	IP:24VDC OP: FULL LOAD Ta:25°C	TEST: <u>OK</u>	

3	TRANSFER TIME (TYP)	$t < 10\text{ms} \pm 3\text{ms}$ inverter $\rightarrow$ by pass	IP: 24VDC OP: (1) no load (2) full load Ta:25°C	(1) no load a. INTER $\rightarrow$ BY PASS <u>3.6</u> ms b. BY PASS $\rightarrow$ INVERTER <u>7.1</u> ms (2) full load c. INTER $\rightarrow$ BY PASS <u>1.1</u> ms d. BY PASS $\rightarrow$ INVERTER <u>7.4</u> ms
---	---------------------	--------------------------------------------------------------------	-------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**PROTECTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	BAT LOW ALARM	22V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>21.95</u> V
2	BAT LOW SHUT DOWN	20V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>20.04</u> V
3	BAT LOW RESTART	25V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>25.02</u> V
4	BAT HIGH ALARM	31V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>31.06</u> V
5	BAT HIGH SHUT DOWN	33V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>32.98</u> V
6	BAT HIGH RESTART	30V $\pm$ 0.5VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>30.01</u> V
7	BAT. POLARITY	By internal fuse open	IP: BAT +/- (Reverse) OP: FULL LOAD Ta:25°C	TEST: <u>OK</u>
8	OVER TEMPERATURE	Shut down o/p voltage: re-power on.	IP: HI LINE/LOW-LINE OP: FULL LOAD SW: ON Ta:25°C	Shut down o/p voltage, re-power on to recover LED DISPLAY: <u>OK</u>
9	OUTPUT SHORT	Shut down o/p voltage: re-power on	IP: 24VDC O/P: FULL LOAD SW: ON Ta:25°C	Shut down o/p voltage, re-power on to recover LED DISPLAY: <u>OK</u>
10	OVER LOAD (typ.)	105%~115%LOAD 180sec 115%~150%LOAD 10 sec Shut down o/p voltage, re-power on to recover	IP: 24VDC OP: TESTING SW: ON Ta:25°C	(1). <u>106% ~ 113%</u> <u>180.1</u> sec (2). <u>116% ~ 147%</u> <u>10.1</u> sec Shut down o/p voltage, re-power on to recover

**CONTROL FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	REMOTE CONTROL	(1) Power ON-OFF remote control by front panel dry contact connector (by RELAY) Open : Normal work Short : Remote off (2) IRC3	IP: 24VDC OP: FULL LOAD Ta:25°C	(1).Open : <u>Normal work</u> Short : <u>Remote off</u> TEST: Vo= <u>0.002V</u> Pin= <u>6.57 W</u> (2).TEST: <u>OK</u>

**APPLICATION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	LAMP	LAMP: <u>1002 W</u> · turn on <u>OK</u> LAMP: <u>2005 W</u> · turn on <u>OK</u> LAMP: <u>3012 W</u> · turn on <u>OK</u>	1. Vin=HIGH LINE 2. 110V/60Hz	TEST: <u>OK</u>
2	INDUCTION MOTOR	<u>0.22</u> HP	1. Vin=HIGH LINE 2. 110V/60Hz	TEST: <u>OK</u>
3	SWITCHING POWER SUPPLY	WITH PFC: <u>RSP-3000-48</u> O/P= <u>2573 W</u>	1. Vin=HIGH LINE 2. 110V/60Hz	TEST: <u>OK</u>
		NO PFC: <u>SE-1000-48</u> O/P= <u>1149 W</u>	1. Vin=HIGH LINE 2. 110V/60Hz	TEST: <u>OK</u>

**COMPONENT WEAFORM TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC TO DC Power Transistor ( D to S) or (C to E) Peak Voltage	Q107 /Q111/Q127/Q131 Rated: 100 V / 120A	I/P: high line O/P: V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(6400W) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	Q107                      Q111 VDS:                      VDS: (1) 81.9V                      (1) 81.2V (2) 81.9V                      (2) 81.2V (3) 87.7V                      (3) 82.5V (4) 84.4V                      (4) 81.9V (5) 83.8V                      (5) 81.9V  Q127                      Q131 VDS:                      VDS: (1) 81.9V                      (1) 78.7V (2) 81.9V                      (2) 78.7V (3) 85.1V                      (3) 81.9V (4) 84.4V                      (4) 80.6V (5) 83.2V                      (5) 79.9V

2	DC TO DC Diode Peak Voltage	D 901 Rated : 1000V/ 16 A	I/P: high line O/P: V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(6400W) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	(1) 521V (2) 593V (3) 529V (4) 529V (5) 529V
3	DC BUS Capacitor Voltage	C905/C907 Rated: 820u/315V	I/P: high line O/P: V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(6400W) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	C905 (1) 252V (2) 256V (3) 254V (4) 256V (5) 254V C907 (1) 252V (2) 261V (3) 254V (4) 256V (5) 254V
4	DC TO AC Power Transistor ( D to S) or (C to E) Peak Voltage	Q 1 Rated: 650 V/ 50A	I/P: high line O/P: V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(6400W) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	Q1: VDS: (1) 521V (2) 618V (3) 533V (4) 525V (5) 525V
5	AUX PWM MOS	Q201 Rated: 65 A/ 200 V  Q504 Rated : 46A/250 V	I/P: high line O/P: V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(6400W) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	Q201 (1) 103.9V (2) 103.9V (3) 103.9V (4) 103.9V (5) 103.9V Q504 (1) 73.6V (2) 73.6V (3) 73.6V (4) 73.6V (5) 73.6V
6	Control IC Voltage Test	MCU IC U301 Rated 2.4V~ 3.6 V  AUX IC U201 Rated 8.2V~30V  CHARGE IC U501 Rated 8.4V~30V  Gate Driver IC U1 Rated 3V~18V	I/P: high line O/P: V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(6400W) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25°C	U301 (1) 3.36V (2) 3.36V (3) 3.36V (4) 3.36V (5) 3.36V U501 (1) 12.6V (2) 12.6V (3) 12.6V (4) 12.6V (5) 12.6V  U201 (1) 12.24V (2) 12.24V (3) 12.24V (4) 12.24V (5) 12.24V U1 (1) 5.04V (2) 5.04V (3) 5.04V (4) 5.04V (5) 5.04V



## SAFETY & EMC TEST

### SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	BAT I/P-AC O/P: 3 KVAC/min BAT I/P-AC I/P: 3 KVAC/min AC O/P-FG: 1.5 KVAC/min	BAT I/P-AC O/P 3.6 KVAC/min BAT I/P-AC I/P: 3.6 KVAC/min AC O/P-FG:1.8 KVAC/min Ta:25°C	BAT I/P-AC O/P: 11.95 mA BAT I/P-AC I/P: 11.63 mA AC O/P-FG: 7.61 mA NO DAMAGE
2	GROUNDING CONTINUITY	EN 60950 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25°C	6mΩ

### E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONDUCTION	CE CLASS A	I/P: 24 VDC O/P: FULL LOAD/50% LOAD Ta:25°C	PASS
2	RADIATION	CE CLASS A	I/P:24 VDC O/P: :FULL/50% LOAD Ta:25°C	PASS
3	HARMONIC	EN61000-3-2 CLASS A	I/P: 24 VDC O/P: FULL LOAD Ta:25°C	PASS
4	E.S.D	EN61000-4-2 AIR : 8KV / Contact : 4KV	I/P: 24VDC O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INPUT: 1KV	I/P: 24VDC O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 L-N :1KV L,N-PE:2KV	I/P: 24VDC O/P:FULL LOAD Ta:25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

## Reliability Test

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : NTU-3200-248 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 48 VDC O/P : FULL LOAD Ta= 25 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 48VDC O/P : FULL LOAD Ta= 40 °C		

NO	Position	ROOM AMBIENT Ta= 25 °C	HIGH AMBIENT Ta= 40 °C
5	Q132	43.2°C	55.2°C
6	Q122	38.6°C	51.8°C
7	Q137	48.3°C	60.2°C
8	Q127	33.9°C	47.5°C
9	C108	42.2°C	53.2°C
10	C100	44.8°C	55.8°C
11	T101 coil1	72.7°C	80.8°C
12	T101 core	39.2°C	52.0°C
13	Q116	36.5°C	50.1°C
14	Q106	45.1°C	57.5°C
15	Q111	34.3°C	48.4°C
16	Q101	40.2°C	52.7°C
17	D903	41.4°C	53.9°C
18	D916	40.5°C	52.6°C
19	D912	37.2°C	49.9°C
20	U301	32.1°C	45.9°C
21	Q201	46.6°C	63.0°C
22	R273	52.2°C	70.6°C
23	T202	36.1°C	51.0°C
24	T201	36.9°C	50.0°C
25	C905	38.1°C	50.5°C
26	Q8	63.5°C	74.1°C
27	Q4	59.1°C	70.2°C
28	TSW2	52.0°C	62.5°C
29	TSW3	37.6°C	49.5°C
30	Q1	55.1°C	65.4°C
31	D530	25.2°C	40.6°C
32	T501	26.0°C	41.4°C
33	Q504	25.3°C	40.5°C
34	C6	26.8°C	42.4°C
35	LF2	25.2°C	41.0°C
36	LF1	33.7°C	48.1°C
37	C2	32.3°C	46.2°C
38	C1	26.8°C	41.5°C
39	U1	31.7°C	45.6°C
40	R58	37.3°C	49.2°C
41	R136	39.7°C	52.3°C
42	R155	43.5°C	56.0°C
43	U102	43.0°C	56.5°C
44	U201	49.9°C	63.7°C
45	ZNR1	27.0°C	41.8°C
46	R79	45.0°C	56.9°C
47	RTH7	41.5°C	53.8°C

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 48VDC O/P : 102%LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 48VDC O/P : 100%LOAD Ta= -30 °C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40 °C NO DAMAGE	I/P : 66VDC O/P : FULL LOAD Ta= 38.8 °C HUMIDITY= 95 %R.H	TEST : OK
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input /Output condition : STATIC		TEST : OK
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C~ +45°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input /Output condition : 15cycle:48VDC/ FULL LOAD DC ON 11sec/DC OFF 1sec TEST 1cycle:48VDC/ FULL LOAD Burn In Test		TEST : OK
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 4G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
8	CAPACITOR LIFE CYCLE	SUPPOSE C140 IS THE MOST CRITICAL COMPONENT (1) I/P : 48VDC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 48VDC O/P : FULL LOAD Ta= 40 °C LIFE TIME (3) I/P : 48VDC O/P : FULL LOAD Ta= 40 °C LIFE TIME (4) I/P : 48VDC O/P : FULL LOAD Ta= 40 °C LIFE TIME		(1) 905590.8HRS (2) 422473.1HRS (3) 613782.4HRS (4) 813440.9HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 319.3K hrs min. Telcordia SR-332 (Bellcore) ; 30.3K hrs min. MIL-HDBK-217F (25°C)		
10	Ongoing Reliability Test	I/P : 50VDC O/P : 80% LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Liutt		Wangdz

2020.10.1 TAG-QA-009