



















Features

- Constant Voltage + Constant Current mode output
- Metal housing with class I design
- IP67 / IP65 rating for indoor or outdoor installations
- · Function options: output adjustable via potentiometer; 3 in 1 dimming
- Typical lifetime > 62000 hours
- 7 years warranty

Description

Applications


- LED street lighting
- LED high-bay lighting
- Parking space lighting
- · LED fishing lamp
- · LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

HLG-185H series is a 185W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-185H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-185H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding

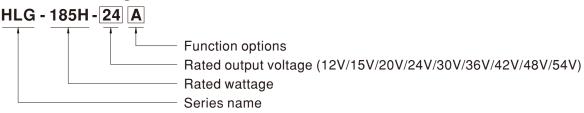

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65 lo and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)		In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request



SPECIFICATION

MODEL			HLG-185H-12	HLG-185H-15	HLG-185H-20	HLG-185H-24	HLG-185H-30	HLG-185H-36	HLG-185H-42	HLG-185H-48	HLG-185H-54
MODEL	DC VOLTAGE		12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT RECION NAME A			7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
	CONSTANT CURRENT REGION Note.4 RATED CURRENT		13A	11.5A	9.3A	7.8A	6.2A	5.2A	4.4A	3.9A	3.45A
		1	156W	172.5W	186W	187.2W	186W	187.2W	184.8W	187.2W	186.3W
	RATED POWER										
	RIPPLE & NOISE (max.) Note.2		150mVp-p 150mVp-p 150mVp-p 150mVp-p 200mVp-p 200mVp-p								
	VOLTAGE ADJ. RANGE CURRENT ADJ. RANGE		10.8 ~ 13.5V		17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V
OUTPUT			Adjustable fo		l .	1		33 - 40 0	30 * 40 V	45 ~ 55 V	49 ~ 30 V
			6.5 ~ 13A	5.75 ~ 11.5A		3.9 ~ 7.8A	3.1 ~ 6.2A	2.6 ~ 5.2A	2.2 ~ 4.4A	1.95 ~ 3.9A	1.72 ~ 3.45
				±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	VOLTAGE TOLERANCE Note.3 LINE REGULATION		±0.5%	±0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%	± 0.5%
	LOAD REGULAT		±2.0%	±1.5%	±1.0%	±0.5%	± 0.5%	± 0.5%	± 0.5%	±0.5%	±0.5%
							⊥ 0.5%	⊥0.5%	⊥0.5%	⊥0.5%	⊥0.5%
	SETUP, RISE TIME		1000ms,200ms/115VAC 500ms,200ms/230VAC								
	HOLD UP TIME (1	iyp.)	16ms / 115VAC, 230VAC								
	VOLTAGE RANG	E Note.5	90 ~ 305VAC	127 ~ 431		IC" cootion)					
			(Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RA	NGE	47 ~ 63Hz								
	POWER FACTOR	(Typ.)	PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC @ full load								
			,	o "POWER FA	. ,		,	0)			
	TOTAL HARMONIC	DISTORTION					≥75% / 277VA	(C)			
INPUT	EFFICIENCY (T	`	,	to "TOTAL HA		1	<u> </u>	00.50/	0.40/	0.40/	0.40/
	EFFICIENCY (Typ	1	91.5%	92%	93%	93.5%	93.5%	93.5%	94%	94%	94%
	AC CURRENT	12V	1.8A / 115VA			.7A / 277VAC					
	(Тур.)	15V ~ 54V	2.1A / 115VAC								
	INRUSH CURRENT (Typ.)		COLD START 65A(twidth=445µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. No. of PSU		4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURR										
	LEARAGE CURK	EIN I	<0.75mA/277VAC								
	OVER CURRENT		95 ~ 108%								
	CHORT OIDOUIT		Constant current limiting, recovers automatically after fault condition is removed Constant current limiting, recovers automatically after fault condition is removed								
DDOTECTION	SHORT CIRCUIT		14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V
PROTECTION	OVER VOLTAGE							41~400	47 * 33 V	34 ~ 03 V	33 - 03 0
			Shut down o/p voltage with auto-recovery or re-power on to recovery								
	OVER TEMPERATURE Note.9										
	WORKING TEMP		Tcase= -40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
	MAX. CASE TEMP.		Tcase=+90°C								
ENVIRONMENT	WORKING HUMIDITY		20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY										
	TEMP. COEFFICIENT		±0.03%/°C (0~60°C)								
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
	SAFETY STANDARDS		UL8750(type"HL"), CSA C22.2 No. 250.0-08;BS EN/EN 61347-1,BS EN/EN 61347-2-13, AS/NZS 61347-1(except for AB-type), AS/NZS 61347-2-13(except for AB-type) independent; GB19510.1, GB19510.14 (except for D-type); IP65 or IP67; J61347-1, J61347-2-13(except for D-type), EAC TP TC 004, KC61347-1, KC61347-2-13(except for D-type) approved								
SAFETY &	WITHSTAND VOLTAGE		I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC								
EMC	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION		Compliance to BS EN/EN55015, BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class C (@ load ≥ 50%); BS EN/EN61000-3-3,GB/T 17743, GB17625.1(except for D-type) ,EAC TP TC 020, KSC 9815(except for D-type)								
	EMC IMMUNITY		Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020, KSC 9547(except for D-type)								
-	MTBF		2184.8K hrs min. Telcordia SR-332 (Bellcore) ; 197.3K hrs min. MIL-HDBK-217F (25℃)								
	DIMENSION		228*68*38.8n	nm (L*W*H)							
			1 15Kg 12pcs	s/14.8Kg/0.8Cl	JFT						
	PACKING		o.tg,pot								


185W Constant Voltage + Constant Current LED Driver

NOTE

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance : includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.
- 9. For OTP which triggered at light load/no load condition, proceed AC repower on to recovery.
- 10. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75 °C or less.
- 11. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com.
- 12. The ambient temperature derating of 3.5° C/1000m with fanless models and of 5° C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 13. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf
- 14. For A/AB type need to consider build in using to comply with Type HL application.
- 15. Products sourced from the Americas regions may only have the UL, CE and UKCA logos. Please contact your MEAN WELL sales for more information.
- ※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx


■ BLOCK DIAGRAM

Fosc: 100KHz

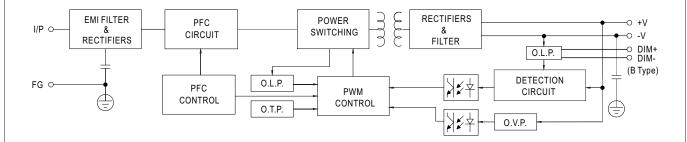

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

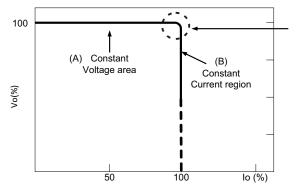


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




imes 3 in 1 dimming function (for B/AB-Type)

- $\cdot \ \mathsf{Output} \ \mathsf{constant} \ \mathsf{current} \ \mathsf{level} \ \mathsf{can} \ \mathsf{be} \ \mathsf{adjusted} \ \mathsf{by} \ \mathsf{applying} \ \mathsf{one} \ \mathsf{of} \ \mathsf{the} \ \mathsf{three} \ \mathsf{methodologies} \ \mathsf{between} \ \mathsf{DIM+} \ \mathsf{and} \ \mathsf{DIM-} \mathsf{ind} \ \mathsf{one} \ \mathsf{one$
 - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 1 ~ 10VDC

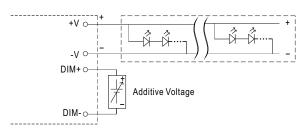


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

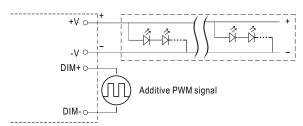



"DO NOT connect "DIM- to -V"


Applying additive resistance:

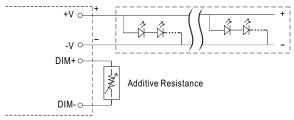

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

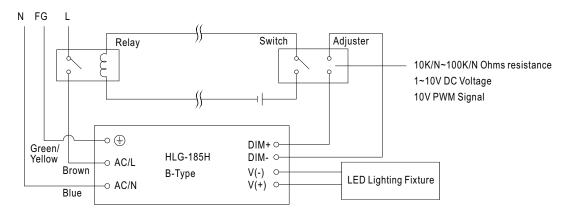


Using a switch and relay can turn ON/OFF the lighting fixture.




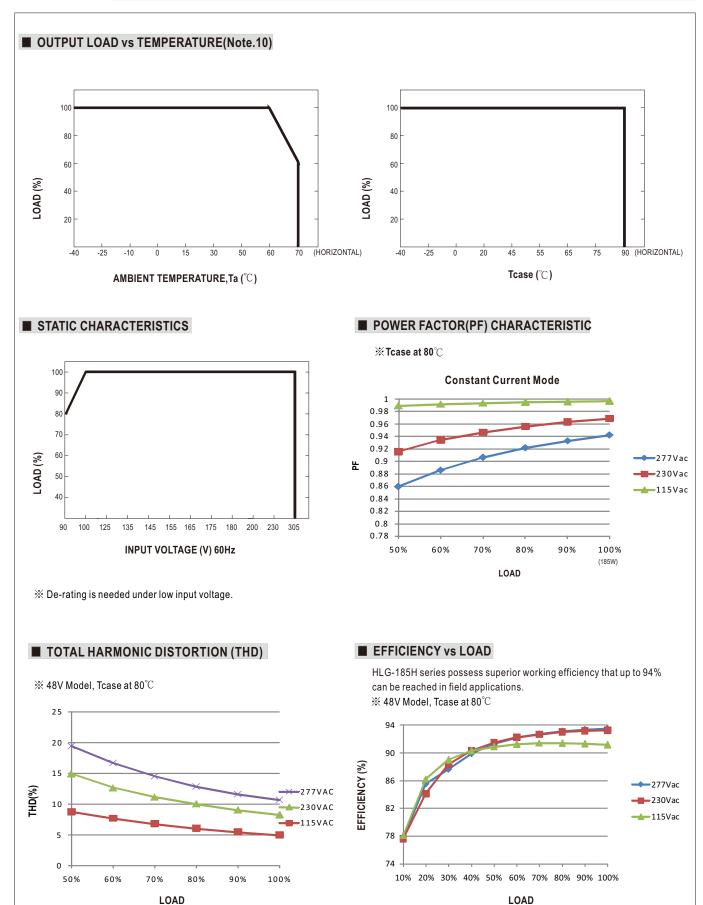


■ LIFE TIME

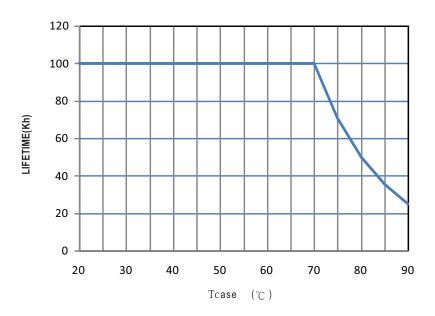

HLG-185H series

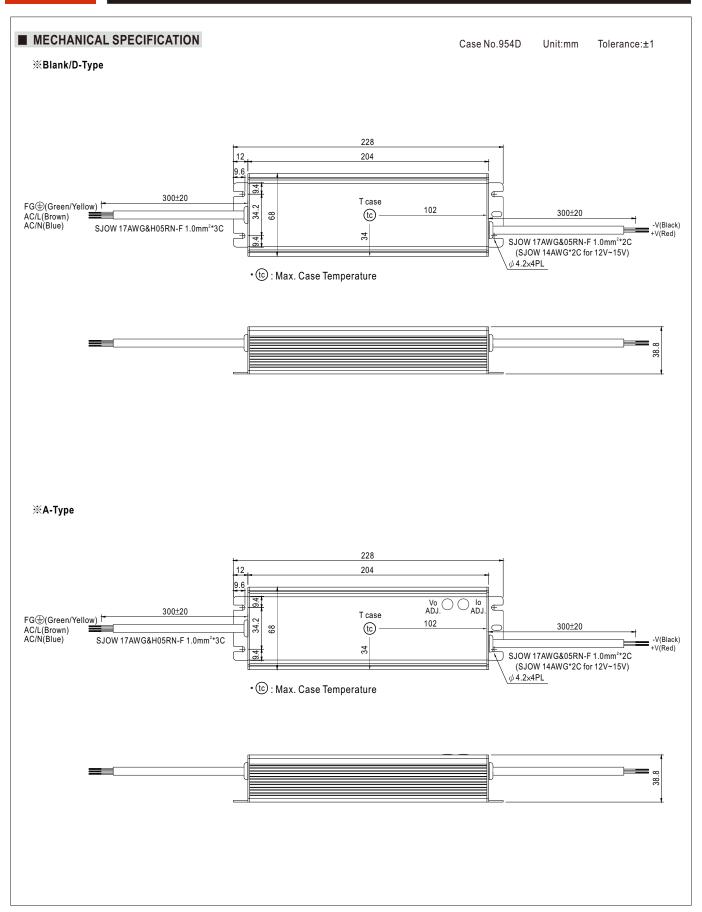



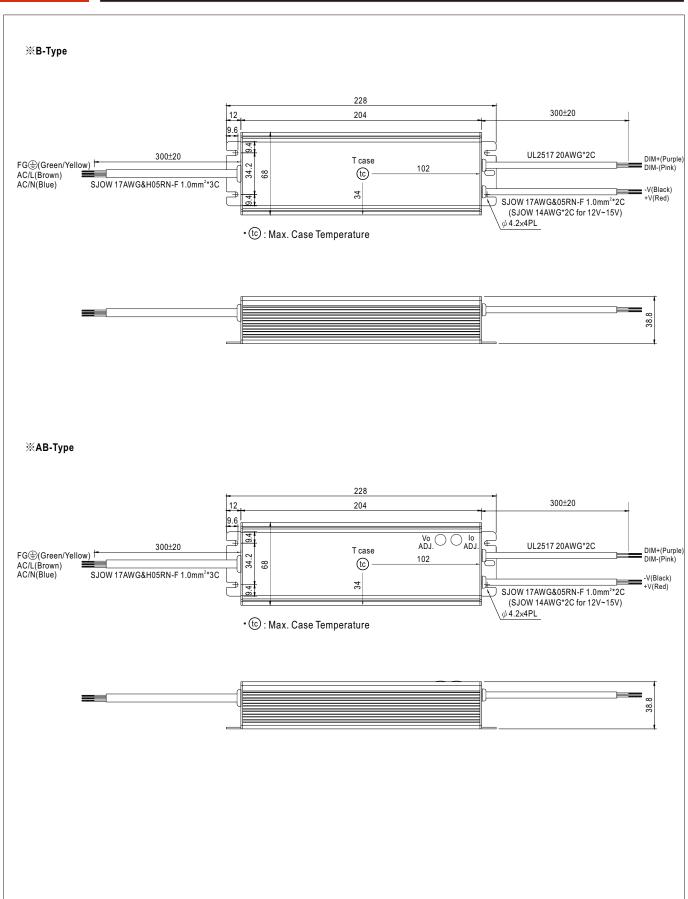




■ WATERPROOF CONNECTION

$\frak{\%}$ Waterproof connector


 $Waterproof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-185H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$

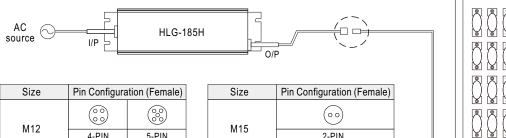

Size	Pin Configuration (Female)			
M12	00	000		
IVITZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		


Size	Pin Configuration (Female)	
M15	00	
MIJ	2-PIN	
	12A/PIN	
Order No.	M15-02	
Suitable Current	12A max.	LED La

※ Cable Joiner

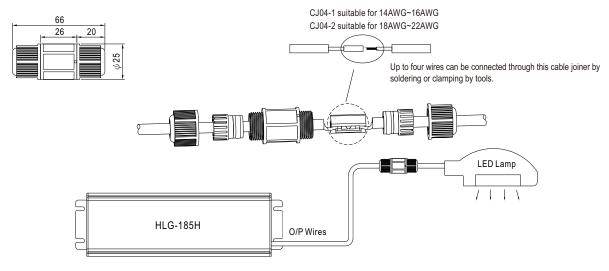

O CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

※ Junction Box Option

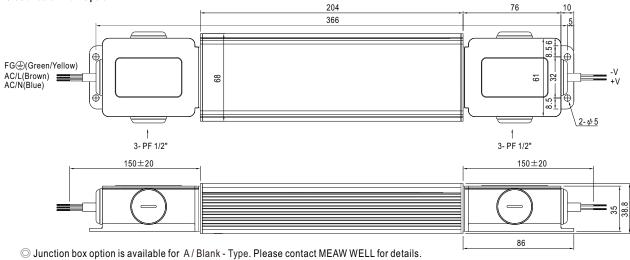

■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html